



BAB TECHNOLOGIE GmbH

APPMODULE

Documentation

Version 1.3.2

Type: IP, KNX, EnOcean

Item no.: 10491, 10495, 13501

Manual version IV
As of 05/2017
Date: 12. May 2017

EN



BAB TECHNOLOGIE GmbH

STILWERK Dortmund
Rosemeyerstr. 14
D-44139 Dortmund

info@bab-tec.de

Tel.: +49 (0) 231 – 476 425 - 30
Fax: +49 (0) 231 – 476 425 - 59
www.bab-tec.de



TABLE OF CONTENTS

1	APP MODULE.....	6
1.1	Functional overview.....	7
1.2	APP MODULE functional principle	7
1.3	Technical data	8
1.4	Scope of delivery and interfaces	9
	Factory setting on delivery:	9
1.5	Updates	9
1.6	Important information on the operating instructions	9
1.7	Functional safety.....	9
2	Assembly	10
2.1	LED status.....	11
2.2	Initial Operation	12
2.2.1	Language	12
2.2.2	System requirements	12
2.2.3	Establishing connections.....	13
2.2.3.1	Calling up the APP MODULE web interface.....	13
2.2.3.2	Adjusting the network settings of your computer	15
2.2.3.3	Adjusting the network settings of the APP MODULE.....	17
3	APP MODULE IP.....	20
3.1	Connecting the APP MODULE IP to EIBPORT	20
	Setting up the connection in the APP MODULE.....	20
	Setting up the connection in EIBPORT	21
3.2	Using KNXnet/IP in the APPMODULE IP	22
4	APPMODULE KNX.....	23
4.1	APPMODULE KNX commissioning	23
4.1.1	Module (KNX configuration)	24
	Logging	25
5	APP MODULE EnOcean	26
5.1	Initial operation of APP MODULE EnOcean	26
	Technical details about the EnOcean Interface.....	26
5.2	Calling up the EnOcean Editor	26
5.3	Usage of the EnOcean Editor	27
5.3.1	Operating principle EnOcean	27
5.3.2	EnOcean Configuration.....	28
5.3.3	EnOcean Settings	30
5.3.4	EnOcean device teach-in procedure	31
5.3.5	Emulating EnOcean devices	34
5.3.6	KNX Addressing	36
5.3.7	Configuration example for EnOcean Push-Button (Rocker).....	37
5.3.7.1	APP MODULE as the receiver (actuator)	37
5.4	EnOcean Geräte löschen	38
5.5	Using KNXnet/IP in the EnOcean APPMODULE	39
6	App Manager	39
6.1	Instance.....	41
6.1.1	Notation of group addresses	42
7	Configuration	43
7.1	Saving the configuration	43
7.2	General.....	43
7.3	Network.....	44



7.4	Module	45
7.5	EnOcean Editor	45
7.6	User administration.....	46
	Disable Password Recovery	46
7.7	Backup the settings	47
	Creating a backup	47
	Restoring a backup	49
7.8	System / firmware update.....	50
	Service.....	50
	Firmware update.....	50
8	Information	52



List of Figures

Figure 1: APP MODULE KNX.....	6
Figure 2: APP MODULE – How it works.....	7
Figure 3: APP MODULE connection diagram.....	10
Figure 4: APP MODULE start page.....	13
Figure 5: Logging in to the web interface.....	13
Figure 6: "Configuration" menu item.....	14
Figure 7: Back to the homepage.....	14
Figure 8: Windows Network and Sharing Center.....	15
Figure 9: "Ethernet" status.....	15
Figure 10: Properties of the LAN connection.....	16
Figure 11: TCP/IPv4 properties.....	16
Figure 12: APP MODULE Webinterface.....	17
Figure 13: Login dialog.....	17
Figure 14: APP MODULE – Main Menu.....	18
Figure 15: APP MODULE Network configuration.....	19
Figure 16: APP MODULE IP Interface Extension.....	20
Figure 17: EIBPORT facility coupling job.....	21
Figure 18: APP MODULE IP Interface KNXnet/IP.....	22
Figure 19: KNX configuration.....	23
Figure 20: KNX – Physical Address.....	23
Figure 21: KNX – assigning a KNXnet/IP tunneling address.....	24
Figure 22: Saving the configuration.....	24
Figure 23: KNX configuration.....	25
Figure 24: Configuration – EnOcean Editor.....	26
Figure 25: EnOcean Configuration - Devices.....	28
Figure 26: EnOcean Configuration - Monitor.....	29
Figure 27: EnOcean Settings.....	30
Figure 28: Calling up properties.....	31
Figure 29: EnOcean Device Configuration.....	32
Figure 30: Receiving KNX parameters.....	38
Figure 32: Devices delete.....	39
Figure 33: Devices delete confirm.....	39
Figure 34: APPMODULE Start menu.....	40
Figure 35: Install APP.....	40
Figure 36: Select APP.....	41
Figure 37: Installation successful.....	41
Figure 38: Create Instance.....	42
Figure 39: Instance functions.....	42
Figure 40: General configurations.....	43
Figure 41: APP MODULE – Network settings.....	44
Figure 42: User administration.....	46
Figure 43: Backup / Restore.....	47
Figure 44: Selecting apps and app instances for backup.....	48
Figure 45: Downloading backup.....	49
Figure 46: Configuration – System.....	50
Figure 47: Keep network settings.....	51
Figure 48: Perform update.....	51
Figure 49: System Information.....	52



1 APP MODULE

Thank you for buying the **APPMODULE**. The **APPMODULE** is a unique integration server that you can customise using the apps from the BAB APPMARKET. This documentation will help to familiarise you with the product and facilitate implementation.

BAB TECHNOLOGIE GmbH



Figure 1: APP MODULE KNX

Product name:	APPMODULE
Intended use:	Module to run applications
Design:	Modular device (REG)
Item number:	10491 (IP), 10495 (KNX), 13501 (EnOcean)



1.1 FUNCTIONAL OVERVIEW

The **APPMODULE** links building automation to third-party applications that otherwise cannot be controlled by building control. The connection is established with applications that can be installed on the **APPMODULE**. You can select your very own combination of apps, and purchase individual apps from the BAB APPMARKET (<https://www.bab-appmarket.de/de/>). The **APPMODULE** is available as “IP” for EIB**PORT**, with KNX- or with EnOcean interface.

1.2 APP MODULE FUNCTIONAL PRINCIPLE

On delivery, the **APPMODULE** contains only the basic software and has no application installed. You can purchase and download the applications for the **APPMODULE** in the BAB APPMARKET. For that purpose you will need an APPMARKET account and an **APPMODULE** registered in the APPMARKET.

HOW IT WORKS

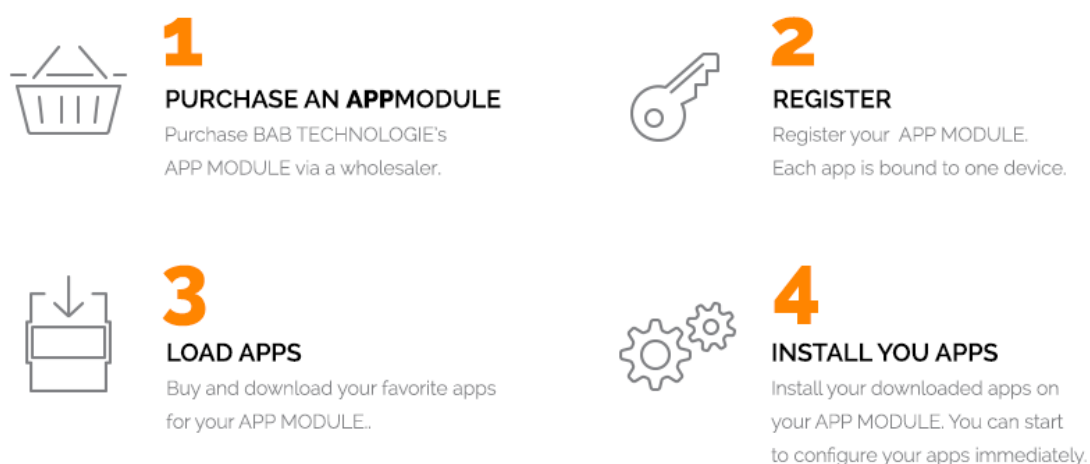


Figure 2: APP MODULE – How it works

You can find the APPMARKET on <https://www.bab-appmarket.de/>



1.3 TECHNICAL DATA

Article No.: 10491 (IP) | 10495 (KNX) | 13501 (EnOcean)

- | | |
|-----------------------------------|--------------------------------------|
| ▪ Operating voltage: | 12-32V DC |
| ▪ Typical power consumption | 300 mA at 12V DC |
| ▪ Power consumption: | <= 5 W |
| ▪ Connection: | Power supply via screw-type terminal |
| ▪ Resistant to climate: | EN 50090-2-2 |
| ▪ Ambient temperature: | -5 to +35 °C |
| ▪ Rel. humidity (non-condensing): | 5% to 80% |

Mechanical data

- | | |
|---------------------------------|-----------------------------------|
| ▪ Assembly: | Modular device (REG) housing 4 TP |
| ▪ Dimensions (W x H x D) in mm: | 70 x 90 x 63 |
| ▪ Housing: | Plastic |
| ▪ Degree of protection: | IP20 (according to EN 60529) |

Interfaces:

- Ethernet over RJ-45 female connector
- KNXconnection
- EnOcean®: external SMA antenna

EnOcean specifications:

- Operating frequency: 868.3 MHz
- Range: 300 m in free space / 30 m in buildings (varies depending on building material)
- Input objects: unlimited
- Output objects: 128
- External antenna: 2.50 m cable, magnetic base and SMA connector

Specific features

- A wide range of different smart home apps can be combined on one device
- SDK available for manufacturers and developers
- A steadily growing app portfolio available in the BAB APPMARKET (bab-appmarket.de)

Software requirements

- Operating System independent
- Communication: Network interface
- Browser: current standard browser



1.4 SCOPE OF DELIVERY AND INTERFACES

The scope of delivery of **APPMODULE** includes the following content:

- 1x **APPMODULE** IP, KNX or EnOcean (currently being planned)
- 1x enclosed CD
- 1x 2.50 m antenna with magnetic base (for EnOcean only)

A power supply unit for the device is NOT included in the scope of delivery!

In addition to the connection for the power supply (**12-32 V DC**), the **APPMODULE** has the following interfaces:

- 1 x RJ 45 Ethernet 100Mbit/s Full Duplex
- KNX® / TP connection or SMA female connector for EnOcean (planned)

FACTORY SETTING ON DELIVERY:

IP address: 192.168.1.224
Username: "admin"
Password: "admin"

1.5 UPDATES

We reserve the right to offer firmware updates free of charge for the **APPMODULE**. We inform you about new firmware in our newsletter or on our homepage. The update files are available in the download section on our homepage.

www.bab-tec.de

1.6 IMPORTANT INFORMATION ON THE OPERATING INSTRUCTIONS

We reserve the right to make technical and formal changes to the product in the interests of technical progress. The information in this documentation may therefore not necessarily be up to date. Information on current **APPMODULE** firmware and on this description ("APPMODULE documentation") can be found at www.bab-tec.de.

1.7 FUNCTIONAL SAFETY

If there are certain requirements to minimize risks for people or objects (functional safety), additional measures are obligatory, which must be considered during planning and implementation. When using the APPs in the **APPMODULE**, there are interactions with many devices/connections (e.g. Internet) in the system, which may lead to risks. Especially failure of individual devices or functions or connections can lead to malfunction of the system. There are different ways to minimise the risks. That depends on the system and customer requirements.

These measures must always have the required independence from the operation of the system (APP MODULE with APP) and must always be available.



2 ASSEMBLY

The operating voltage of the APP MODULE is 12-32 V DC

The device shown here is the **APPMODULE** KNX (form factor identical for all models), REG housing 4 TE. Dimensions (width x height x depth): 70 x 90 x 63 mm

- In order to ensure easy connection of the power supply, remove the screw plug-in terminals (see figure below).
- Now connect the power supply cables to the respective screw plug-in terminals (see figure below). Please consider the **polarity!**
- Now, you can replug the screw plug-in terminals into the **APPMODULE**.
- In the next step, snap the device onto the mounting rail according to DIN EN 60715.



Figure 3: APP MODULE connection diagram

APP MODULE features	
(1)	KNX connection (type 10495) via screw plug-in terminal
(2)	Power supply via screw plug-in terminal 12-32V DC
(3)	USB connection (is not activated)
(4)	RJ-45 female connector for Ethernet LAN



2.1 LED STATUS

The **APPMODULE** has two DUO LEDs ("Power/Boot" and "Status"). Each DUO LED has a green and a red LED.

POWER / BOOT LED

LED display	Status
OFF	The device is not ready for operation. No operating voltage is supplied.
GREEN	The device is ready for operation.
FLASHING ORANGE	The device is booting.

STATUS LED

LED display	Status
OFF	The device is booting.
FLASHING GREEN	The device has been started; the LED simulates a "heartbeat". The flashing interval increases depending on the device utilisation.
FLASHING RED	Communication takes place via KNX.

Explanation:

The green "Power/Boot" LED lights up as soon as the **APPMODULE** is supplied with power. Two to three seconds after the power supply has been switched on, this LED also starts to flash red (flashing orange) until the booting process has been completed. Then the LED is permanently illuminated green, while the "Status" LED flashes green (simulates a "heartbeat"). The flashing frequency increases depending on the device utilisation.

It takes approx. **2 minutes** to start the **APPMODULE**.



2.2 INITIAL OPERATION

If the **APPMODULE** has been mounted and started as described in chapter "Assembly", commissioning can now be continued as specified below.

Factory setting on delivery:

IP address	192.168.1.224
Subnet mask	255.255.255.0
Username	admin
Password	admin
Device Name	AppModule

Note: The password must be changed immediately when logging in for the first time. If the password is lost, the device cannot be reset!

2.2.1 LANGUAGE

Web interface

The language used for the **APPMODULE** Web interface is based on the language set in the browser. German and English are currently available in the **APPMODULE**. If the browser is set to a language other than German or English, English is displayed in the **APPMODULE** interface.

Java application (EnOcean Editor)

The language in the "EnOcean Editor" Java-based application adjusts to the language set in the browser after start-up from the browser. If the app is used in BAB STARTER, the language set in the operation system applies. English is used if a language other than German or English is set.

2.2.2 SYSTEM REQUIREMENTS

- Current browser (e.g. Firefox, Chrome, Safari, etc.)
- If applicable, an app from the APPMARKET (<https://www.bab-appmarket.de/de/>)
- For EnOcean configuration: BAB STARTER or current JVM & JVM browser plugin



2.2.3 ESTABLISHING CONNECTIONS

In order to configure the **APPMODULE**, a current browser and a network connection to the device are required. If the device is in the condition of delivery, it can be accessed at the above-mentioned IP address and the network settings must be adjusted to the address range, where necessary. Please follow the information given in the chapter "[Adjusting the network settings of your computer](#)" for this purpose.

2.2.3.1 CALLING UP THE APP MODULE WEB INTERFACE

The **APPMODULE** is configured via its web interface so that it can be configured via each web browser. The "EnOcean Editor" layers are Java applications and also require a Java Virtual Machine (JVM) or the BAB STARTER (see "[Establishing connections](#)").

In order to call up the web interface, please proceed as described below:

- Open a browser and enter the IP address of the **APPMODULE** into the address line (Information about the factory settings can be found in chapter "[Initial Operation](#)")

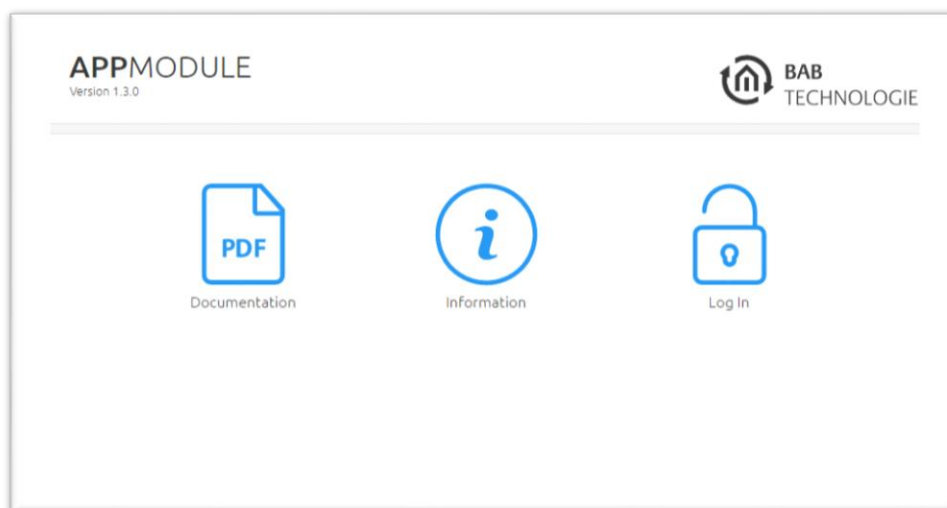


Figure 4: APP MODULE start page

- You will reach the **APPMODULE** start page. The "Login" unlocks the "Configuration" Functions whereas "Information" shows general system information.
- Use the user data to log in to the web interface: "Log In". (Information on the authorisation settings can be found in chapter "[Initial Operation](#)")

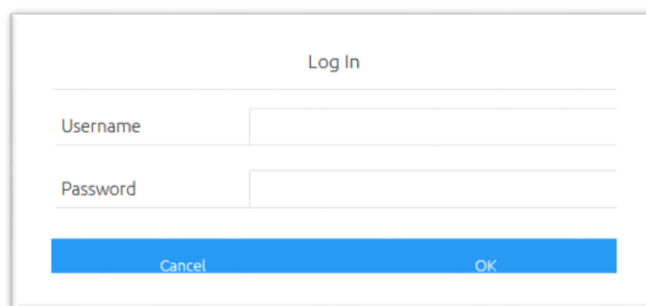


Figure 5: Logging in to the web interface

- You can then also access the "Configuration" menu item. See chapter "[Configuration](#)"




Figure 6: "Configuration" menu item

- To return to the main menu, just click on the header graphic.



Figure 7: Back to the homepage



2.2.3.2 ADJUSTING THE NETWORK SETTINGS OF YOUR COMPUTER

In order to adjust the network settings of your computer and establish a connection to the device, please proceed as described below:

- Open the IP address settings (under Windows 7):
- Click "Start Button" --> "Control Panel" --> "Network"
- Select "Network Connection", then "LAN Connection" ("Intel PRO1000 GT" in the figure below).

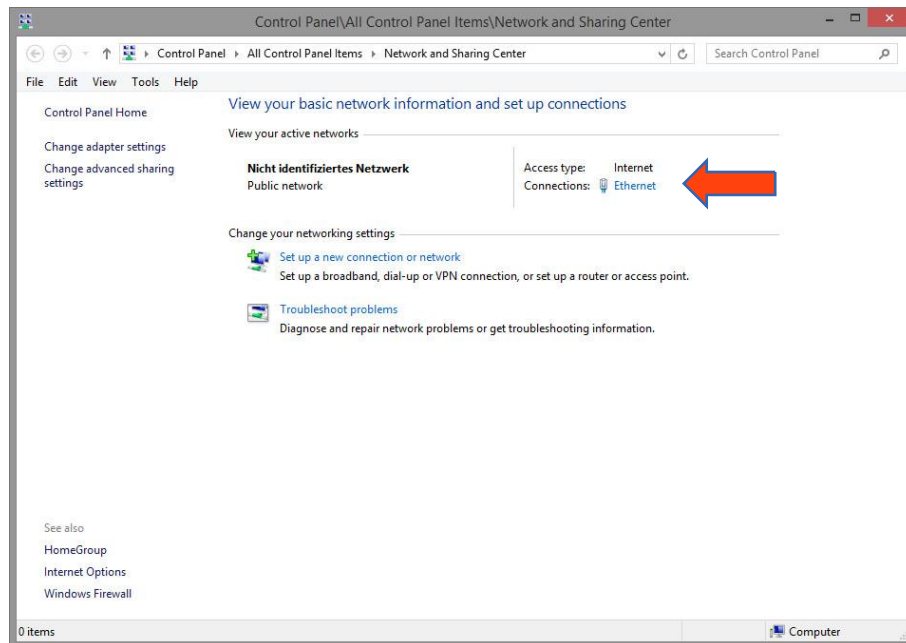


Figure 8: Windows Network and Sharing Center

- Then click "Properties":

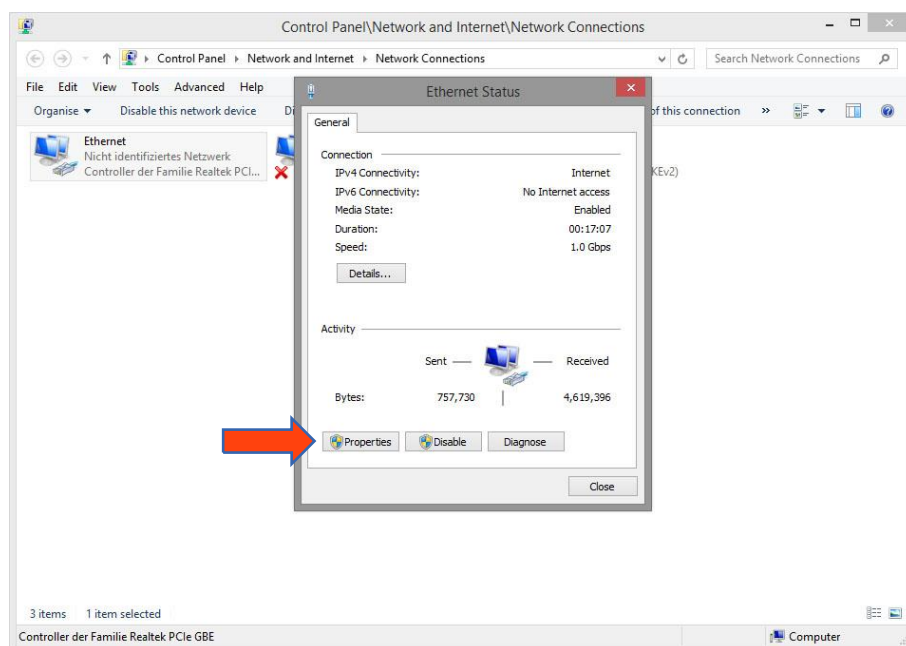


Figure 9: "Ethernet" status



- Select "Internet protocol Version 4 (TCP/IPv4)" and click "Properties" again:

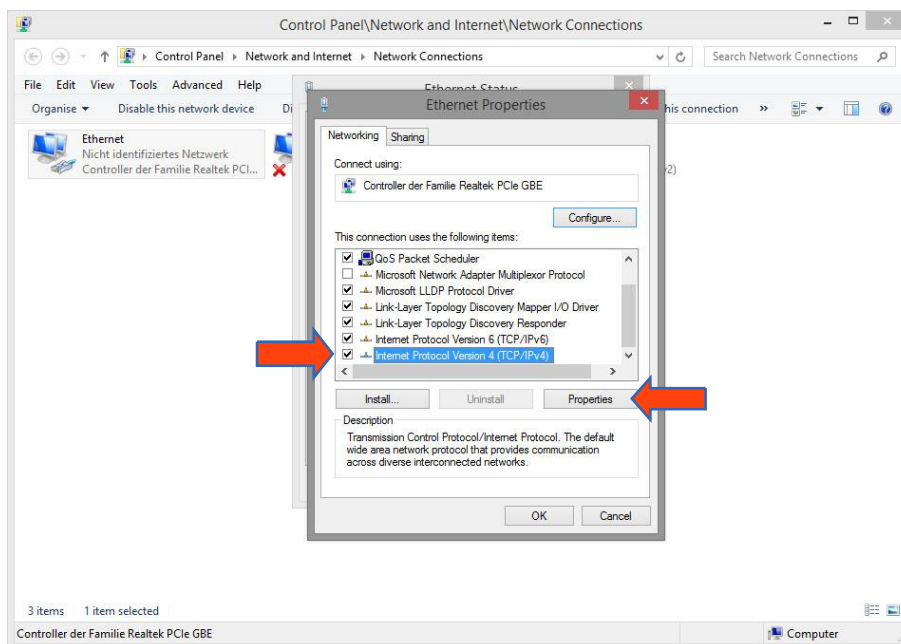


Figure 10: Properties of the LAN connection

- Now note down the current IP address settings or take a screenshot in order to ensure that you can reset the IP address setting following the configuration of the **APPMODULE**.
- Now change the IP address settings (IP address and subnet mask) as required:

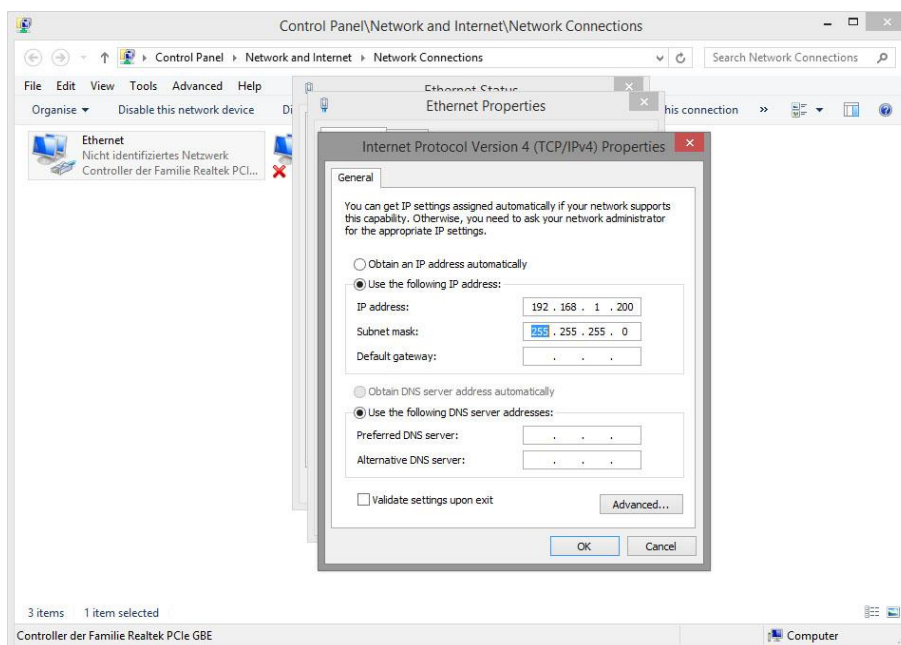


Figure 11: TCP/IPv4 properties

Example of a valid configuration for the factory settings of the **APPMODULE**:

- Free IP address: 192.168.1.228
- Subnet mask: 255.255.255.0
- Now confirm your input with "OK".
- Close all windows until the "Windows Network and Sharing Center Settings" window is shown.



Thus, you have adjusted the network settings of your PC to those of the **APPMODULE**. You can access the web interface of the **APPMODULE** by means of the browser. Restore the original network settings of your PC by following the steps described above as soon as you have configured the **APPMODULE** correspondingly.

If the IP address of your PC and your **APPMODULE** are in the same network mask, you can continue with the configuration.

2.2.3.3 ADJUSTING THE NETWORK SETTINGS OF THE APP MODULE

If the network prerequisites have been created, you can now access the configuration of the **APPMODULE** in order to adjust the network settings to the local requirements there. To do this, please proceed as described below:

- Enter the IP address of the **APPMODULE** in the address line of your browser (for factory settings: 192.168.1.229).

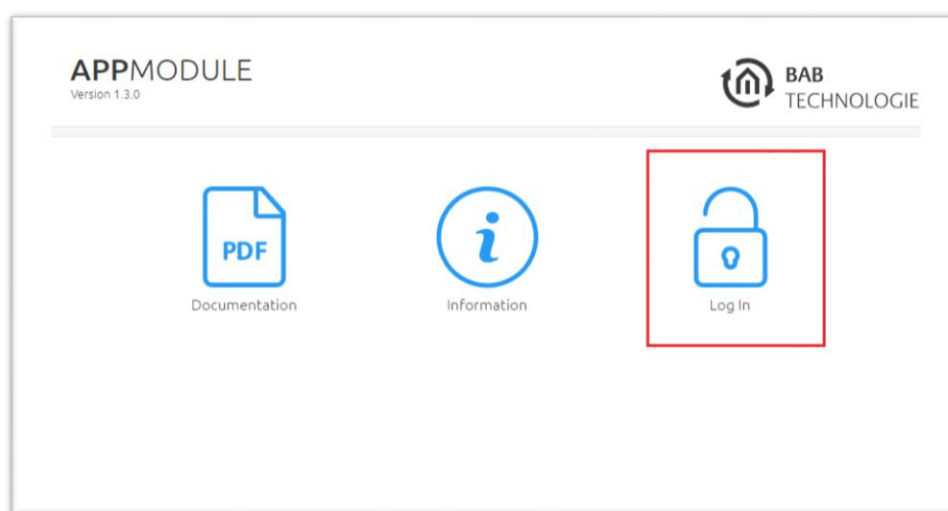


Figure 12: APP MODULE Webinterface

- The start page of the **APPMODULE** opens up. Click "Log In".
- A login dialog appears. For factory settings, the login data is as follows:

Username: **admin**
Password: **admin**

Figure 13: Login dialog

Note: The password must be changed immediately when logging in for the first time. If the password is lost, the device cannot be reset!

Note: Logging in only works if the browser is authorised to save cookies!



- The view on the start page changes. You can now access the following levels:
 - App Manager
 - Configuration
 - Information
 - Log Out
- In order to change the IP address of the **APPMODULE**, please click "Configuration"

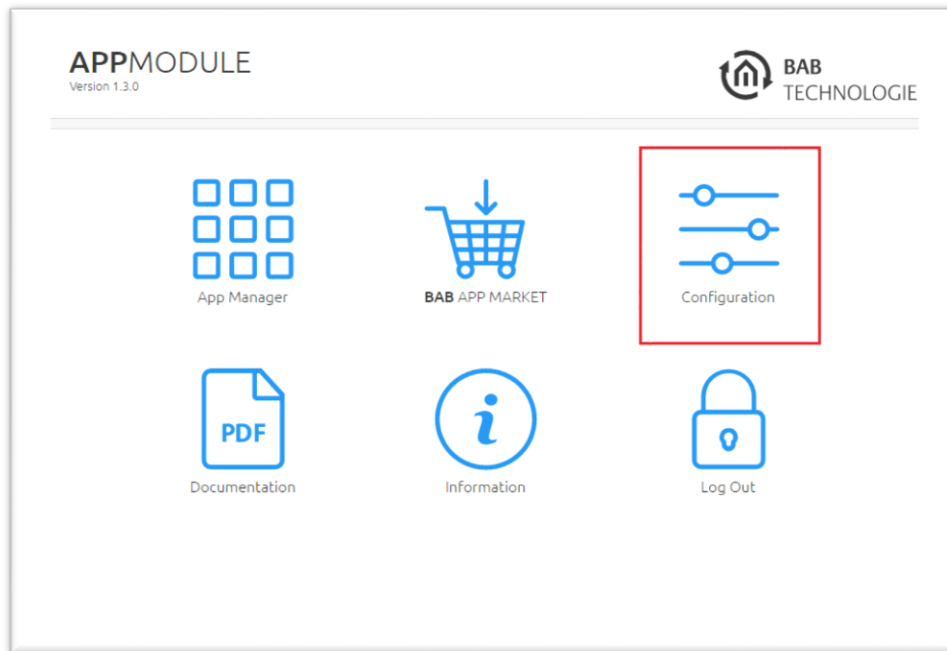


Figure 14: APP MODULE – Main Menu

The configuration menu opens up. You can make the following settings in the "Network" menu item:

- DHCP:** If DHCP is active, the device automatically obtains the network settings. A DHCP server must be available in the local network.
- IP address / subnet mask / gateway:** Field for the static assignment of IP addresses. Please make also sure that the subnet mask (often 255.255.255.0) and the gateway entry are correct. (Often the IP address of the WLAN router).
Note: Without a correct gateway entry, the device will not be able to communicate with the Internet.
- DNS server:** DNS is the abbreviation for Domain Name System. The DNS server converts Internet addresses, for example "www.bab-tec.de" into the IP address "85.214.89.170" and vice versa. Without a valid DNS entry, NTP-, weather- or UPnP services do not work.
- NTP server:** NTP is a free service for synchronising the system time of Internet-compatible devices. If it is not possible to establish the connection to an NTP-Server, the system time must always be checked and adjusted manually (see menu "General")
 NTP-Server list: e.g. <http://www.pool.ntp.org/zone/europe>



APPMODULE
Version 1.3.0

Start > Configuration

General
Network >
nOcean Editor
Module
User Administration
Backup / Restore
System

Device Settings

DHCP ☐

IP Address 192.168.7.7

Netmask 255.255.255.0

Gateway 192.168.7.154

DNS Server

DNS Server #1 192.168.7.154

DNS Server #2 8.8.8.8

DNS Server #3

NTP Server

NTP Server #1 0.de.pool.ntp.org

NTP Server #2 2.2.2.2

NTP Server #3

Save Configuration

Save Configuration

Figure 15: APP MODULE Network configuration

Change the IP address settings as required. In order to save the settings made, click "Save Configuration". The server in the device is restarted, the browser automatically connects to the new IP address if possible.

Note: Please bear in mind that you might have to reset the IP address of your computer to the initial value in order to be able to access the APP MODULE after the change has been made.

Specialty when activating DHCP

If you have activated DHCP for the APPMODULE according to the steps mentioned above, please use the BAB STARTER like depicted in the chapter "*Fehler! Verweisquelle konnte nicht gefunden werden.*" to find out the current IP-address.



3 APP MODULE IP

The IP **APPMODULE** (10491) is an IP for EIB**PORT** available thanks to the facility coupling protocol implemented. A KNXnet/IP server is also implemented.

3.1 CONNECTING THE APP MODULE IP TO EIBPORT

Before the **APPMODULE** can communicate with EIB**PORT**, facility coupling needs to be set up.

Note: For facility coupling between EIBPORT and the APP MODULE to work, communication over UDP with port 1735 (or another port if set) is required. Security installations in more complex networks can prevent this communication.

SETTING UP THE CONNECTION IN THE APP MODULE

In the **APPMODULE**, go to the “Configuration” -> “Module” menu. Information on accessing the **APPMODULE** Web interface can be found in “[Calling up the APP MODULE web interface](#)”.

The screenshot displays the 'Konfiguration' (Configuration) page for the APPMODULE, version 1.3.0, by BAB TECHNOLOGIE. The left sidebar contains a menu with 'Allgemein', 'Netzwerk', 'Modul' (selected), 'Benutzerverwaltung', 'Einstellungen sichern', and 'System'. The main content area is titled 'Kommunikation' and includes a 'Konfiguration speichern' button. Under 'Kommunikation', there is a dropdown for 'IP-Schnittstelle auswählen' set to 'Extension'. Below this is the 'KNX-Schnittstelle' section with fields for 'Physische Adresse' (4.7.12), 'KNXnet/IP Routing' (checkbox), 'KNXnet/IP Tunneling' (checkbox), and 'KNXnet/IP Tunneling Adresse' (4.7.13;4.7.14). The 'Extension-Schnittstelle' section includes a dropdown for 'Extension-Schnittstelle' set to 'BMX UDP', a 'Zielhost' field (192.168.1.222), a 'BMX TCP Port' field (1735), and a 'Format Gruppenadressen' dropdown set to '3 Level (xx/y/zzz)'.

Figure 16: APP MODULE IP Interface Extension

- Select “Extension” under “Select IP Interface”. This enables the “Extension interface” section.
- *Target host:* For “Target host”, enter the address of the required EIB**PORT** (e.g. 192.168.1.222).



- *BMX UDP port:* In the standard scenario, the facility coupling in EIBPORT is **set to** BMX port 1735 (you can check this in EIBPORT under “System” – “Configuration” – “Advanced EIB (yabus) settings” – “BMX UDP port”).
- *Group address format:* Not relevant here. Enter “3 Level (xx/y/zzz)”.

This sets up communication from the **APPMODULE** to EIBPORT. Communication from EIBPORT to the **APPMODULE** must be set up at the EIBPORT end.

SETTING UP THE CONNECTION IN EIBPORT

To set up the connection in EIBPORT, you will need the EIBPORT “Facility coupling” job. For detailed information on the job, please see the EIBPORT documentation.

- In EIBPORT, open the “Job editor” (“Editor” – “Window” – “Job editor”) and add a new “Facility coupling” job.

Rules/Transformations	Source (EIB world)	Target (EIB world)
Rule #1 *	*/*/*	*/*/*
Rule #2		
Rule #3		
Rule #4		
Rule #5		
Rule #6		
Rule #7		
Rule #8		
Rule #9		
Rule #10		

Figure 17: EIBPORT facility coupling job

The following fields must be configured:

- *Host name / IP address:* Enter the address of the **APPMODULE** to which you wish to connect here (e.g. 192.168.1.224).
- *Target system ID:* Please do not change this value. The system ID must be “0”.
- *Rule #1:* Enter the wildcard rule “*/ */*” in both fields (source & target). This rule transfers all group addresses.

The job is active as soon as you save and the group addresses are transferred.



3.2 USING KNXNET/IP IN THE APPMODULE IP

The IP **APPMODULE** contains a complete KNXnet/IP server. KNXnet/IP Routing can be used for a connection to KNX (must be provided by another device with a KNX interface, e. g. a KNX-IP-Router) and KNXnet/IP Tunneling as an interface for ETS.

Proceed as follows to set up the KNXnet/IP server:

- Open the “Configuration” – “Module” and select “KNXnet/IP” under “Select interface”. This enables the “KNX interface”.

The screenshot displays the APPMODULE Version 1.3.0 configuration interface. The left sidebar shows a navigation menu with options: General, Network, Module (selected), User Administration, Backup / Restore, and System. The main content area is titled 'Configuration' and includes a 'Save Configuration' button. The 'Module' section is expanded, showing the 'Communication' tab. Under 'Communication', the 'Select IP Interface' dropdown is set to 'KNXnet/IP'. Below this, the 'KNX Interface' section is visible, containing fields for 'Physical Address' (4.7.12), 'KNXnet/IP Routing' (checked), 'KNXnet/IP Tunneling' (checked), and 'KNXnet/IP Tunneling Address' (4.7.13;4.7.14). The 'Extension Interface' section is also visible, with fields for 'Extension Interface' (BMX UDP), 'Destination Host', 'BMX Port' (1735), and 'Group Address Format' (3 Level (xx/y/zzz)).

Figure 18: APP MODULE IP Interface KNXnet/IP

More information on KNXnet/IP setup can be found in “[Module \(KNX configuration\)](#)”.



4 APPMODULE KNX

4.1 APPMODULE KNX COMMISSIONING

There is no ETS application for the **APPMODULE** KNX (item no. 10495). All KNX-related settings are made over the Web interface of the **APPMODULE**.

Note: For the ETS project, please use a dummy application to record the use of the physical address of the APP MODULE.

- Access the website of the **APPMODULE** and log on (see “[Calling up the APP MODULE web interface](#)”).
- Switch to the “Configuration” > “Module” menu.

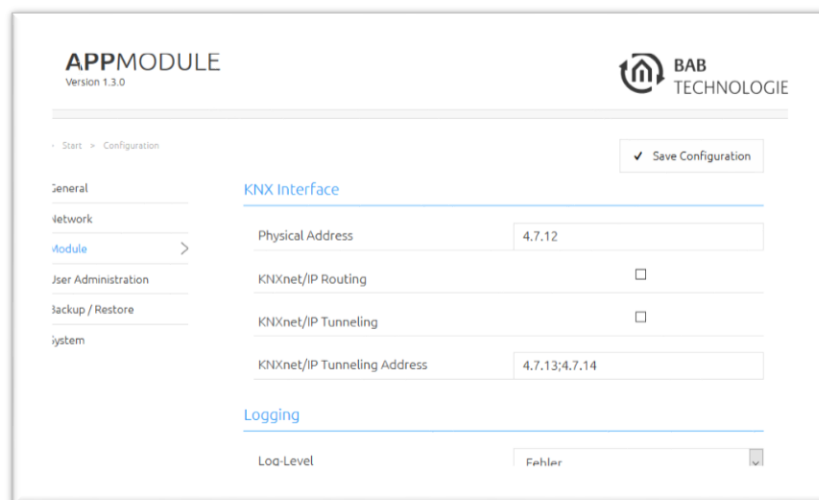


Figure 19: KNX configuration

- Change the “Physical address”. Please follow the rules for assigning physical addresses in a KNX system.

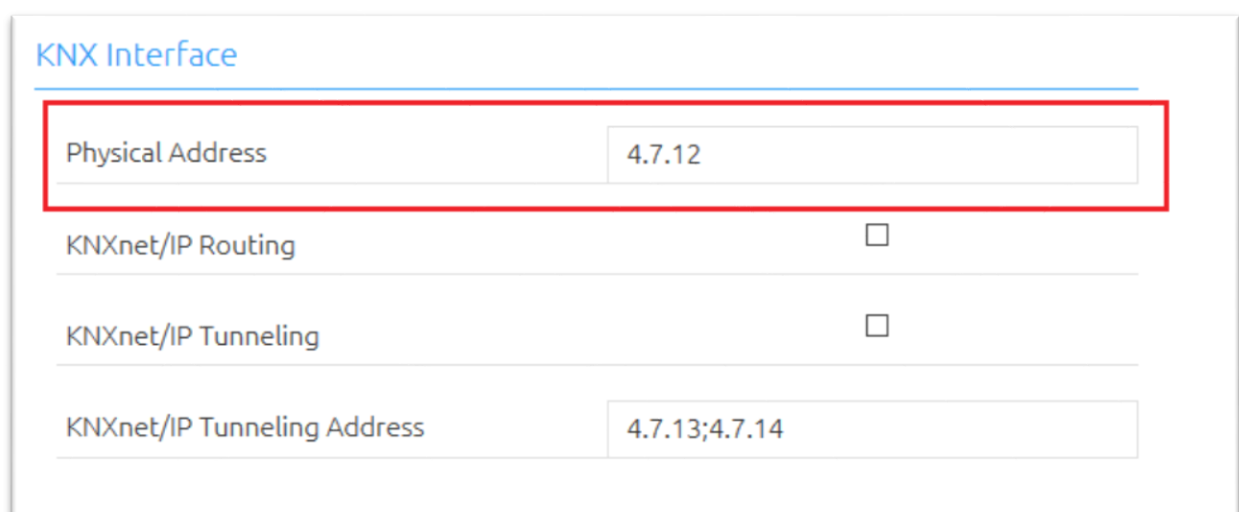


Figure 20: KNX – Physical Address



- Assign at least 2 physical addresses (not used in the relevant line) for KNXnet/IP Tunneling.

Figure 21: KNX – assigning a KNXnet/IP tunneling address

Note: These addresses are required for establishing a connection for the commissioning software ETS for use of the APP MODULE as an interface to KNX. As of ETS 5, at least 2 free addresses are required here.

- Save the configuration.

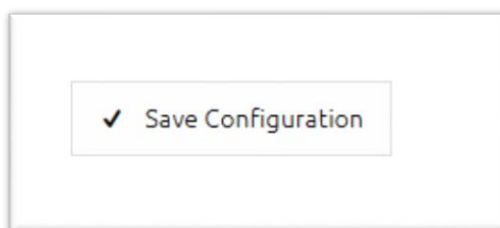


Figure 22: Saving the configuration

4.1.1 MODULE (KNX CONFIGURATION)

The KNX-specific settings of the **APPMODULE** are made in the “Module” menu. The KNX settings are available both for a **APPMODULE** KNX (10495) and for the **APPMODULE** EnOcean (13501) & **APPMODULE** IP (10491). For the **APPMODULE** EnOcean & **APPMODULE** IP, the settings are used to configure the KNXnet/IP server.

Physical address:

Here, you can determine the physical address to be used by the **APPMODULE** in the KNX network. Please make sure that the physical address corresponds to the installation site and does not occur twice.

KNXnet/IP Tunneling Address:

This address is used by the internal KNXnet/IP server for a KNXnet/IP Tunneling connection established to the device (using the **APPMODULE** as a programming interface). Please note that this addresses must not be the same as the physical address (see above) and that they must not be used by any other devices in the line either. Please note that for the latest ETS software are at least two addresses required here.

**KNXnet/IP Routing:**

Activates KNXnet/IP Routing for coupling lines and areas via IP. Can only be activated if the physical address corresponds to that of a line or area coupler. KNXnet/IP Routing is based on multicast and all devices send to a multicast group 224.0.23.12. Since multicast packages are usually not transferred by routers, “routing” only works within a subnet.

KNXnet/IP Tunneling:

Activates KNXnet/IP Tunneling access to the device. This connection can be used to program KNX devices or to exchange data. The **APPMODULE** is the server. The above address is used as the physical address for the connection. For each address, only one connection can be established at any one time. On the TCP/IP layer, the connection is made by means of unicast to UDP port 3671.

- Click “Save configuration” to apply the settings.

The screenshot shows the APPMODULE configuration web interface. At the top left, it says 'APPMODULE Version 1.3.0'. At the top right is the 'BAB TECHNOLOGIE' logo. Below the header, there is a breadcrumb trail '> Start > Configuration' and a 'Save Configuration' button with a checkmark. On the left side, there is a navigation menu with the following items: 'General', 'Network', 'Module' (highlighted with a right arrow), 'User Administration', 'Backup / Restore', and 'System'. The main content area is titled 'KNX Interface' and contains the following settings:

Setting	Value
Physical Address	4.7.12
KNXnet/IP Routing	<input type="checkbox"/>
KNXnet/IP Tunneling	<input type="checkbox"/>
KNXnet/IP Tunneling Address	4.7.13;4.7.14

Below the 'KNX Interface' section is a 'Logging' section with a 'Log-Level' dropdown menu currently set to 'Fehler'.

Figure 23: KNX configuration

LOGGING

Set the level of detail for the apps' log messages. Log messages can be accessed in each instance. See "[Instance](#)".

The meaning of the Loglevels:

- Fehler = Errors
- Warnungen = Warnings
- Info = Information
- Fein = Detailed
- Alles = All



5 APP MODULE ENOCEAN

5.1 INITIAL OPERATION OF APP MODULE ENOCEAN

Please connect the plug of the magnetic base antenna to the SMA connector at the housing. Without an antenna, the device has only low transmission and received powers. As soon as the device has started, the EnOcean interface can be used.

Further information on the teaching and controlling of EnOcean devices can be found in chapter "[Usage of the EnOcean Editor](#)"

TECHNICAL DETAILS ABOUT THE ENOCEAN INTERFACE

EnOcean (868 Mhz):

Operating frequency:	868.3 Mhz
Range:	300 m in the free field / 30 m in the building (depending on the building material)
Input objects:	Any number
Output objects:	128
External antenna:	2.50 m cable, magnetic base and SMA plug connector.

5.2 CALLING UP THE ENOCEAN EDITOR

A detailed description for the EnOcean Editor can be found in chapter "[Usage of the EnOcean Editor](#)"!

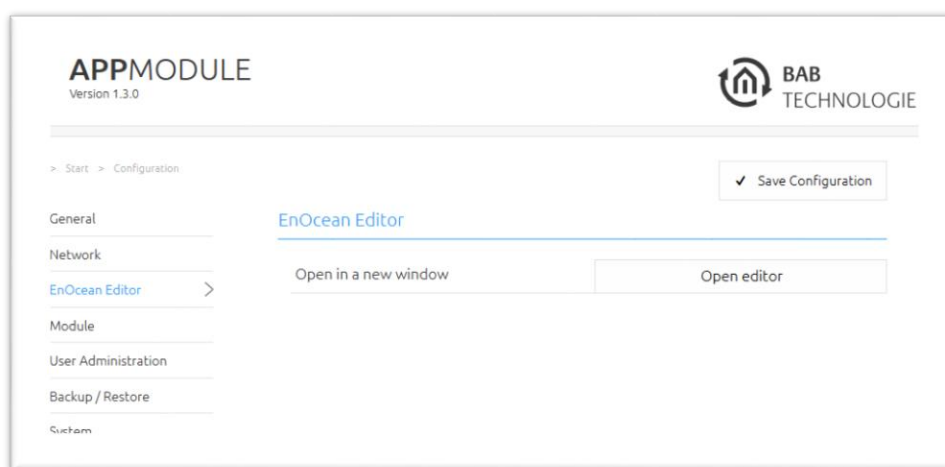


Figure 24: Configuration – EnOcean Editor

1. You call the EnOcean Editor directly in the browser.



5.3 USAGE OF THE ENOCEAN EDITOR

In order to open the EnOcean Editor please follow the description in chapter “[Calling up the EnOcean Editor](#)”!

5.3.1 OPERATING PRINCIPLE ENOCEAN

An EnOcean radio network consists of sensors and actuators. The sensors utilize your ambient energy to transmit the corresponding radio signal. So that an actuator can interpret and respond to the signals of a sensor, the actuator must be adapted to the sensor. The so-called EnOcean Profiles (EEP) determine how the data provided by the sensor are to be interpreted. Thus, it is important that sensor and actuator utilize the same EnOcean Profile (EEP).

Device categories / sensors

EnOcean distinguishes between three device categories in its sensor technology. The device category gives information about the kind of EnOcean signal involved and simultaneously about what the receiver can expect.

- Switch module: A module which sends out a corresponding radio signal via user interaction. That is switches, rockers, position and key card switches as well as window handles.
- 1 byte sensor: A sensor which sends out information of 1 byte size.
- 4 byte sensor: A sensor which sends out information of 4 byte size.

Actuators

Actuators will perform their controlling on the basis of sensor signals. Therefore, sensor and actuator have to be adapted to each other. Thus, it is important to know which EnOcean profile is to be emulated to address a LINKMODULE actuator correctly. The actuator manufacturer will inform you about which profile the actuator utilizes.

EnOcean Profiles (EEP)

The EnOcean profiles (EnOcean Equipment Profile - EEP) define the device category, the function and the device specification. During the APPMODULE configuration, the KNX parameters automatically adapt to the selected profile. The profile consists of 3 number pairs separated by a hyphen: XX-XX-XX

The different positions represent the following:
ORG-FUNC-TYPE

- ORG determines which messages form the communication base (see also 'Device categories/sensors').
- FUNC determines which device is involved, that is e.g. a switch or a temperature sensor.
- TYPE determines the exact specifications of the device functionality.

Transmitter ID (Trans. ID)

Is a definite device address which only exists once. This address allows the sending device to be identified.

Teaching Telegram / LRN Telegram

Is a special telegram used to "teach" the sensor to recognize the actuator, that is, to adapt the actuator to the sensor. It is important for the actuator to know from which hardware address it gets its sensor data. There are several kinds of adapting mechanisms. Please consider the respective descriptions.



5.3.2 ENOCEAN CONFIGURATION

The APPMODULE internally works with the KNX group address system. In order to continue to use received EnOcean signals within the device or to trigger EnOcean telegrams, KNX group addresses must be used. You will find information about this in chapter "[KNX Addressing](#)".

In order to access the corresponding **APPMODULE** configuration mask, please consider the chapter "[Calling up the EnOcean Editor](#)". The window generally consists of three areas:

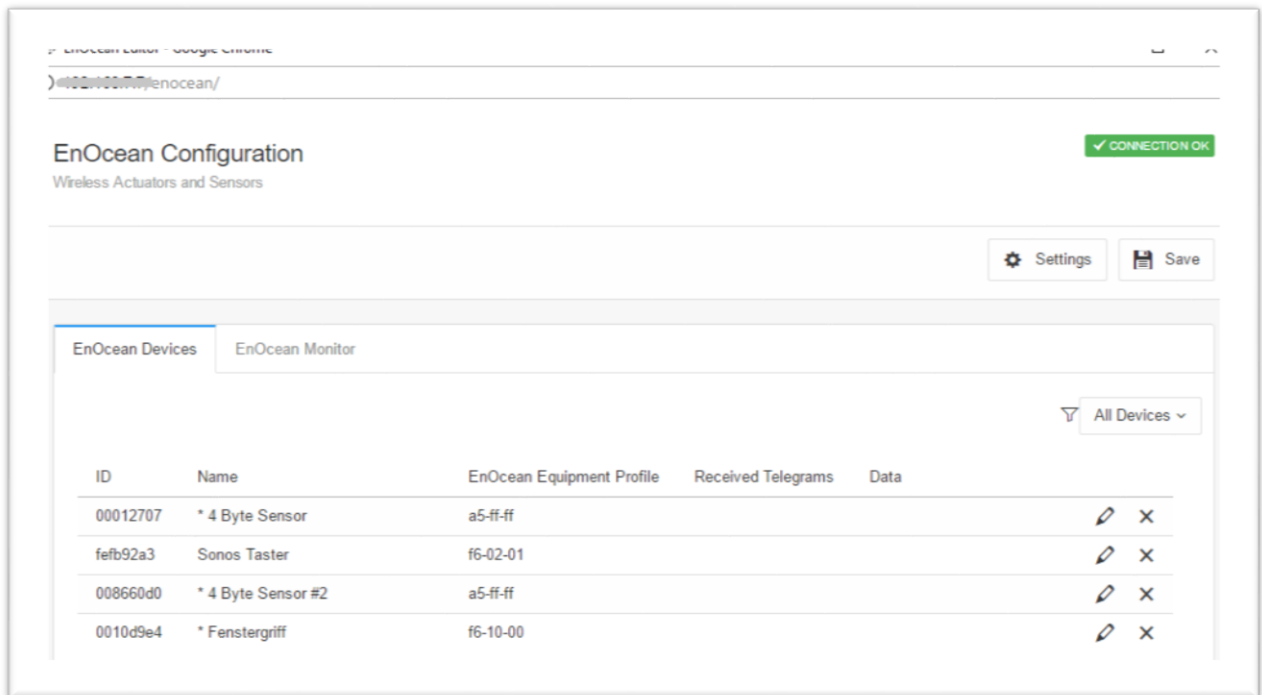


Figure 25: EnOcean Configuration - Devices

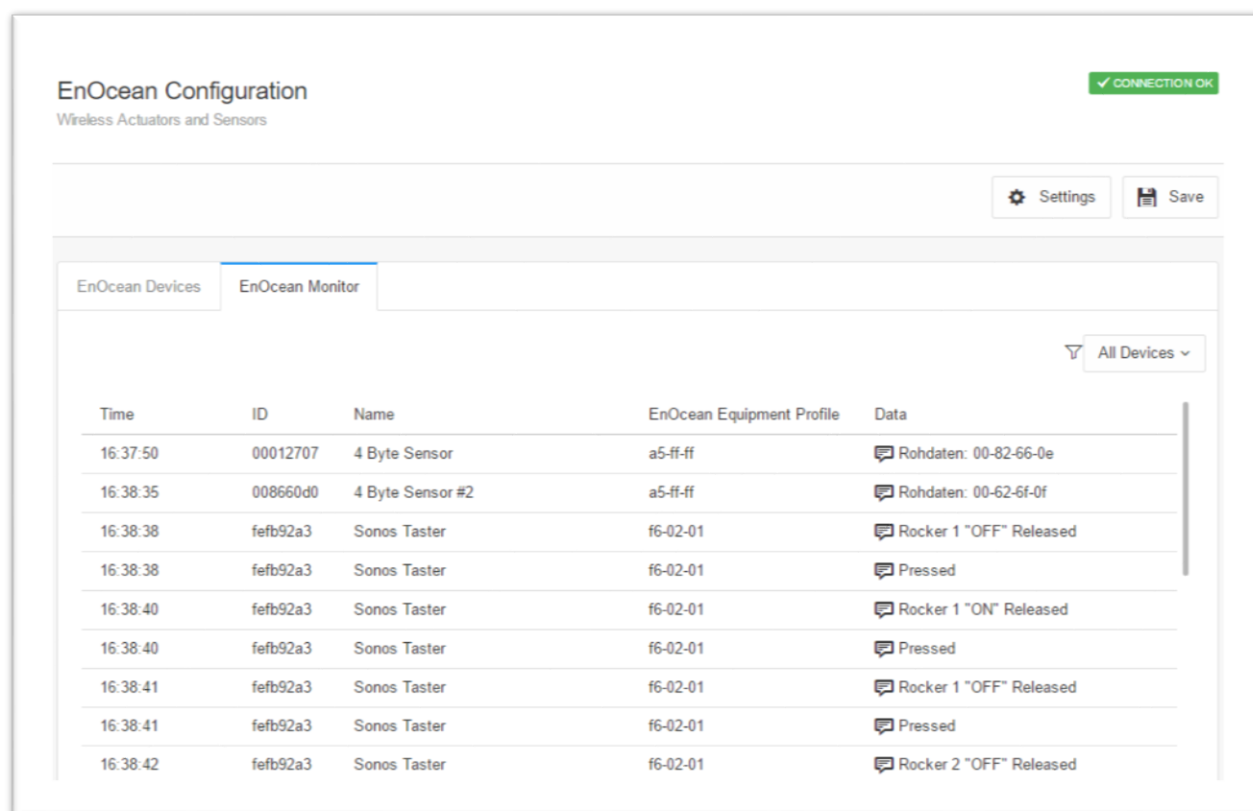


Figure 26: EnOcean Configuration - Monitor

Settings:

- Settings: You can configure the EnOcean module here.
- EnOcean Devices: Lists all EnOcean devices sorted by device id (trans. id).
- EnOcean Monitor: Lists all received EnOcean telegrams sorted by the time at which they were received.



5.3.3 ENOCEAN SETTINGS

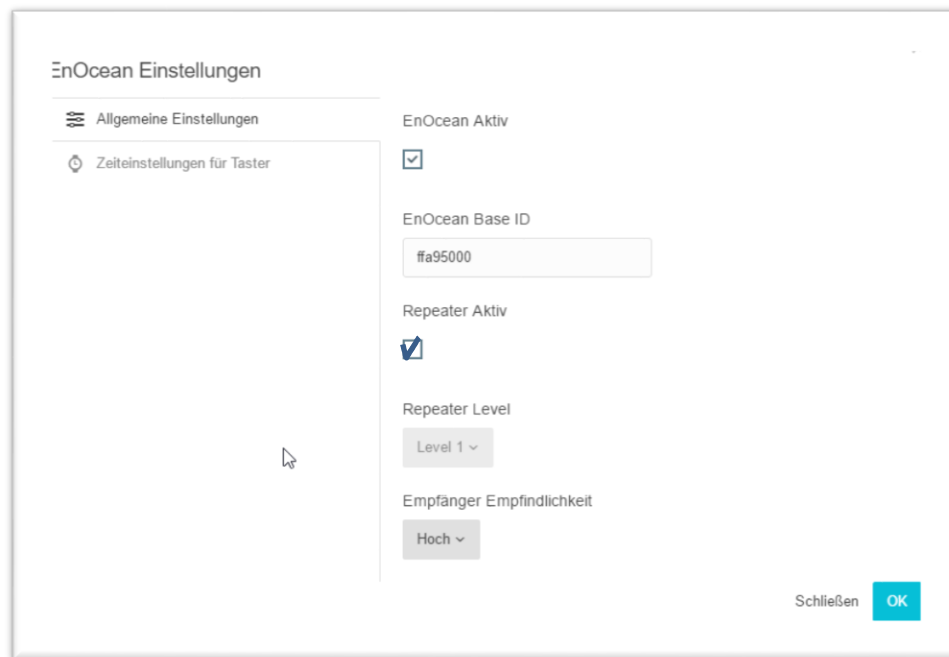


Figure 27: EnOcean Settings

The EnOcean settings show the hardware parameters of the incorporated EnOcean module (TCM 300 Transceiver). The following settings can be performed:

EnOcean active

Here, you can switch the module on or off.

Repeater

The repeater function is used to repeat a receiving signal in order to increase its range. The following settings are available:

- *Check box activates:* Repeater function is turned on.
- *Level 1:* The telegram is repeated by one repeater only.
- *Level 2:* The telegram is repeated by two repeaters.

RX sensitivity

Determine the receiving sensitivity in which you want the EnOcean module to work. You can choose between "Low" and "High".



5.3.4 ENOCEAN DEVICE TEACH-IN PROCEDURE

All EnOcean devices within range are displayed both in the device list and in the telegram list as they are sending something. As already mentioned, the EnOcean telegram must be connected with a group address in order to make it usable for the **APPMODULE**. This is done as follows:

1. Mark the device of interest in the device list.

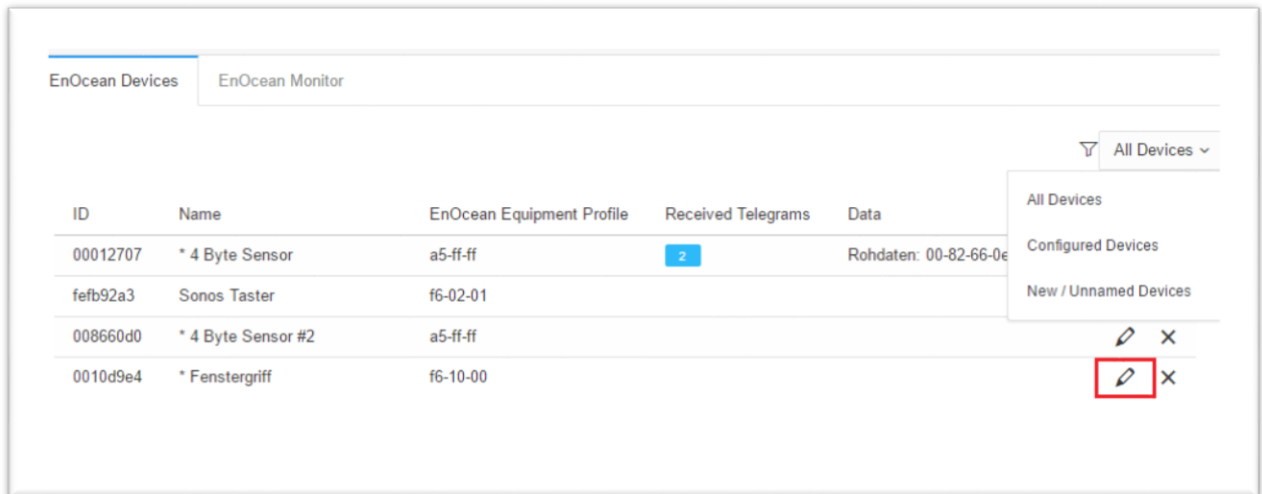


Figure 28: Calling up properties

- *All Devices*: Show all devices
- *Configured Devices*: Show only the devices which have already been configured
- *New / Unnamed Devices*: Show only the new and unnamed devices

Advice: If you are not sure which device has which Trans. ID, activate the device of interest and look up in the device list for which device the telegram counter increases (column "telegrams").

2. When you have detected the device of interest, mark it with the mouse, press the right mouse button and click 'Properties'. Alternatively, double-click on the device.



3. The window "EnOcean Device Configuration" will open. Via this dialogue, the EnOcean devices will be "adapted".
4. Initially, assign a definite "Device Name", referring to the device function. In the input screen, you will further find the following parameters:

- *ID*: This is the unique device address through which the device is identified.
- *EnOcean Equipment Profile (EEP)*: The different EnOcean devices are defined via so-called profiles. Hereby, the device category involved is detected as early as at the signal input and a pre-selection is made. Then it is also possible to select from the profiles known from the **APPMODULE**. As soon as a profile is selected, the corresponding KNX parameters are shown underneath.

Figure 29: EnOcean Device Configuration


5. Select the corresponding profile of your EnOcean device. If you are not sure about which profile your device 'speaks', please contact the manufacturer of the device:

Different parameters appear depending on which profile has been selected. If one switch (rocker) has been selected, various additional functions can be carried out (see chapter "[Configuration example for EnOcean](#)").



6. Choose your switch type in "Parameters".

Figure 30: Parameters

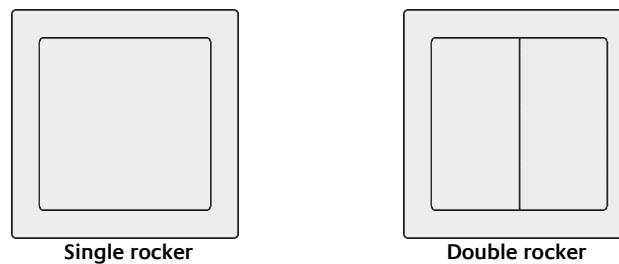

If you choose switch type "Double rocker with dual press action", the APPMODULE will give your two rocker switch a third switch function. This function will be triggered when you press both rockers simultaneously.

7. Next, open the "Address Configuration" configuration panel

8. Now, enter the corresponding KNX group addresses in the address fields to obtain a connection to the selected EnOcean device. You will find detailed information about the KNX group addresses and their assignment in chapter "[KNX Addressing](#)".
9. When you have entered the addresses in the parameters as requested, close the *EnOcean Device Configuration* window.



10. Save the changes in the window "*EnOcean Configuration*" via the button "*Save & Close*" or "*Assume*" (the window stays open).


As soon as this step is taken, the entered KNX telegrams are triggered via EnOcean signals. In order to be able to use the addresses more easily later, you should enter them into the ESF data with a definite designation (see Chapter "[KNX Addressing](#)")

5.3.5 EMULATING ENOCEAN DEVICES

The **APPMODULE** provides a Transceiver Module which not only permits receiving but also sending EnOcean telegrams. In order to do this, the **APPMODULE** emulates an EnOcean device. Via a configuration mask, you can determine which device is emulated with which KNX telegram by the **APPMODULE** (the device internally works with KNX group addresses also during the EnOcean execution).


Creating an emulated device

Click on the button “Add feedback device” to create a new emulated EnOcean device. A new window will be opened.

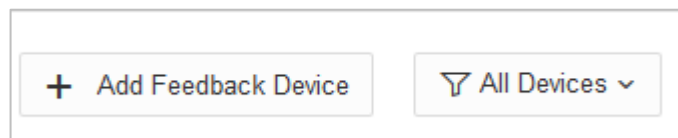

Add feedback device

Depending on which actuator is supposed to be controlled, the matching device profile needs to be determined. The new emulated device will be added to the list of “EnOcean devices”

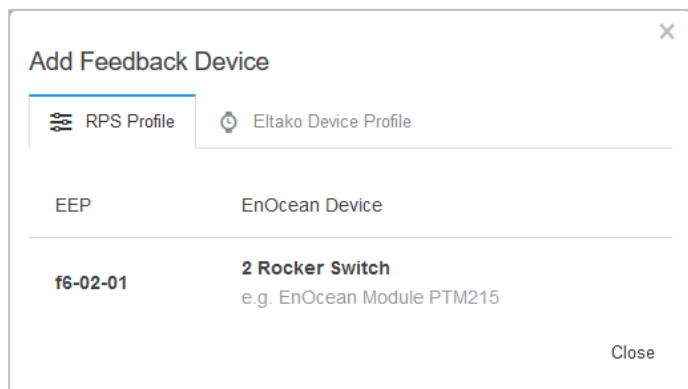



Defining emulated device

The device assigned in this way is initially provided with a definite device name. Additionally, the following parameters are presented

Device Configuration

Name

Tastsensor 1/1/1

ID

00000000

EnOcean Equipment Profile

f6-02-01 2 Rocker Switch

+ Parameters

— Address Configuration

ROCKER 1	ROCKER 2	ROCKER 1 + 2
<div>Simulate Button Press</div> <div>I O</div>	<div>Simulate Button Press</div> <div>I O</div>	<div>Simulate Button Press</div> <div>I O</div>
<div>Function</div> <div>Switching / Dimming ▾</div>	<div>Function</div> <div>Switching / Dimming ▾</div>	<div>Function</div> <div>Switching / Dimming ▾</div>
<div>Switching</div> <div>1/1/1 ></div> <div>1 Bit ▾</div>	<div>Switching</div> <div>1/1/3 ></div> <div>1 Bit ▾</div>	<div>Switching</div> <div>1/1/5 ></div> <div>1 Bit ▾</div>
<div>Dimming</div> <div>1/1/2 ></div>	<div>Dimming</div> <div>1/1/4 ></div>	<div>Dimming</div> <div>1/1/6 ></div>

Close

OK

- *ID*: Is the definite hardware address you have selected before. Can not be modified at this point.
- *EnOcean Equipment Profil (EEP)*: Here, the profile the emulated device should use is selected.

For more information regarding parameter and address configuration, please see [„Configuration example for EnOcean“](#).

Tastendruck simulieren

Hier können Sie für jede Wippe einen Tastendruck simulieren, welcher ein Telegramm verschickt.



5.3.6 KNX ADDRESSING

The **APPMODULE** addressing concept is based on the group addressing of the KNX system. Sending EnOcean Telegrams as well as transmitting received telegrams is performed based on KNX group addresses only. The KNX group address is a 16-bit address which is split in a so-called 'real' and a 'virtual' section. Additionally, there is a 2-digit as well as a 3-digit representation:

3-digit:

MG= Main Group / CG= Central Group / SG= Subgroup
MG / CG / SG

2-digit:

MG= Main Group / SG= Subgroup
MG / SG

Note: The APP MODULE interface only supports the 3-digit representation.

Real / Virtual Address Space

The KNX address space ranges in total from 0/0/0 to 31/7/255 (in the 3-digit representation). Therein, the range from 15/7/255 is designated as real address space and the address space from 16/0/0 to 31/7/255 as virtual address space.

Note: For the communication between EnOcean and KNXnet/IP Routing, only the real address space is used.



5.3.7 CONFIGURATION EXAMPLE FOR ENOCEAN PUSH-BUTTON (ROCKER)

In the following, an exemplary configuration for sending and receiving of an EnOcean push-button (Rocker) profile (profile "*05-02-01: 2Rockers, Light & Blind*") is shown.

5.3.7.1 APP MODULE AS THE RECEIVER (ACTUATOR)

This switch provides either one or two rockers and transmits their status within a radio signal. In order to link these radio signals with KNX, various functions are available:

Configuring Parameters:



- *Invert:* Inverts the telegram content sent on the KNX addresses. Telegram value “1” becomes “0” and vice versa.
- *Individual Timings:* Individual timings determine the length of button presses for switch, move, step.
- *Separate Action:* You can assign further KNX addresses for the separate action “both rockers at the same time”. Please note that this is only possible for buttons with two rockers.

Assigning Addresses:

- *Switching / Dimming:* The EnOcean button can be used as switch and dimmer. A long-press will be interpreted as a dimming command. When used as a switch, the button will send a 0 on “Off” and a 1 on “On”.
- *Push Button:* Pressing “Off” will send an EIS 1 telegram with value 0. Upon releasing the button, another telegram with value 1 will be sent. Pressing “On” will send an EIS 1 telegram with value 1. Upon releasing the button, another telegram with value 0 will be sent. You can assign one address for either position (I and O).
- *Blind:* Assign one address each for the commands “Move” and “Step” (EIS 1).

Figure 31: Receiving KNX parameters

5.4 ENOCEAN GERÄTE LÖSCHEN

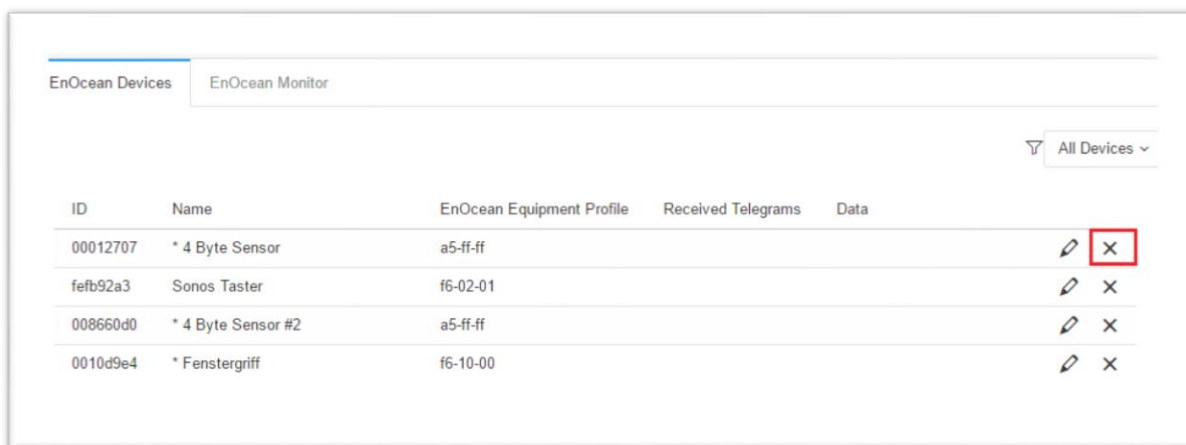


Figure 32: Devices delete

In order to delete an EnOcean device, click on the x symbol. You will be prompted to confirm that you really want to delete it.

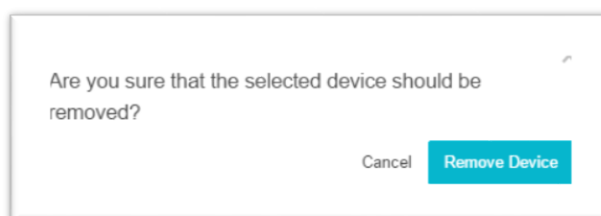


Figure 33: Devices delete confirm

Click on “Delete” to delete it. Afterwards, save the settings. Only then will the device really be deleted. If you do not save the settings after deleting devices, they will only be removed from the list but reappear with their configuration intact once they are rediscovered.

5.5 USING KNXNET/IP IN THE ENOCEAN APPMODULE

The configuration module (KNX) in an **APPMODULE** EnOcean (13501) is used for configuring the device KNXnet/IP server. The KNXnet/IP server is operated with the addresses set on the device. For more information, please see “[Module \(KNX configuration\)](#)”.

6 APP MANAGER

You can install and manage apps under the menu item “App Manager”. In order to manage an App or to change functions/instances, just click on the corresponding App.

You can find the functions of each APP on the homepage of BAB APPMARKET (<https://www.bab-appmarket.de/de/>) or from the ToolTips of the corresponding application.



1. Please call up the web interface of your **APPMODULE**:

<IP address APP MODULE>

2. Click on the menu item „App Manager“, here highlighted red.

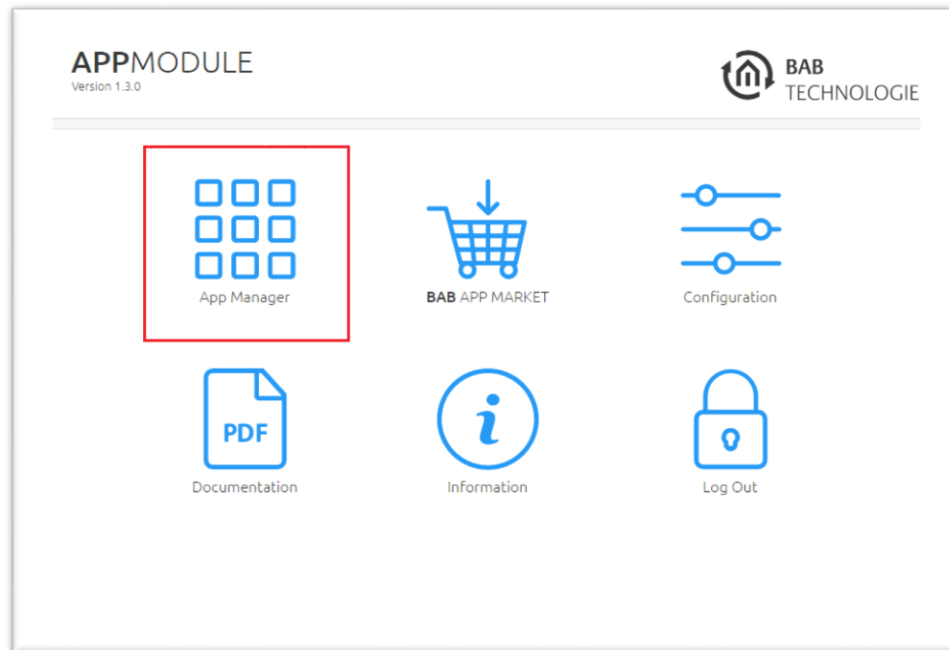


Figure 34: APPMODULE Start menu

3. You have entered the menu, where a list of all on the device already installed Apps are shown. In order to install another App, click on " Install App". See figure below, highlighted red.

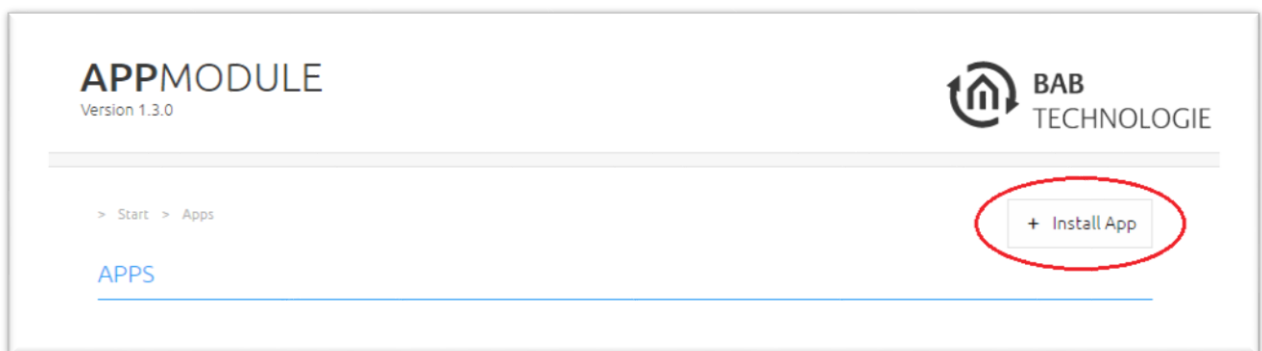


Figure 35: Install APP

4. Click on “Select app” and a window will open. Select the app that you previously loaded from the APPMARKET and click “OK”. See “[APP MODULE functional principle](#)” for information on purchasing apps.

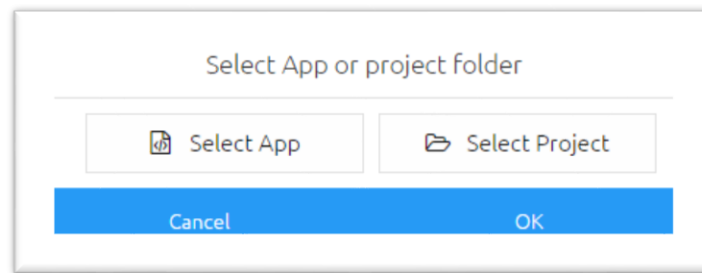


Figure 36: Select APP

5. As soon as the next window opens, the installation was successful. Now, click on "OK" and parameterise your APP.

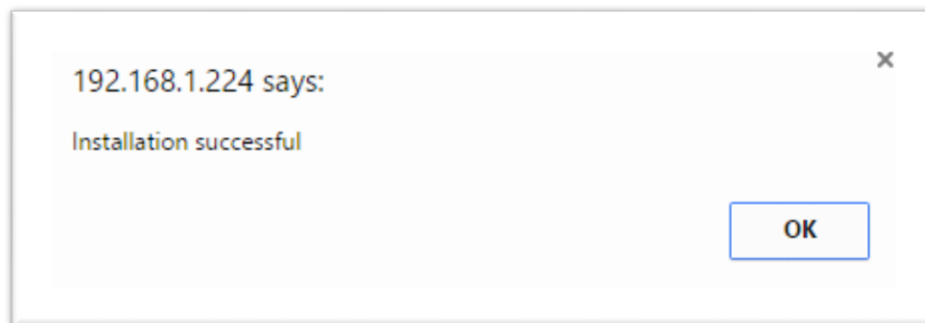


Figure 37: Installation successful

6.1 INSTANCE

As soon as the App is installed, you can create so called "Instance". An Instance is one of several objects of the same class.



In order to create an instance, click on the following symbol "Create Instance".




Figure 38: Create Instance

With the icons on our site, you can start instances, edit parameters, display the LOG, copy or delete instances.



Figure 39: Instance functions

Colour	Function
Red	Start instance
Yellow	Edit parameter
Blue	Display log
Green	Copy instance
Orange	Delete instance

6.1.1 NOTATION OF GROUP ADDRESSES

The group addresses in the **APPMODULE** can either be displayed in 2-digit notation ([XX/XXXX]) or 3-digit notation ([XX/X/XXX]). The **APPMODULE** *always* converts the group addresses into 3-digit display, no matter in which way they were entered.



7 CONFIGURATION

7.1 SAVING THE CONFIGURATION

As soon as you have applied changes, such as on the name and the IP address of the **APPMODULE** and want to save them, click on the button "**Save configuration**".

7.2 GENERAL

Click on "Configuration" to make changes to the general settings.

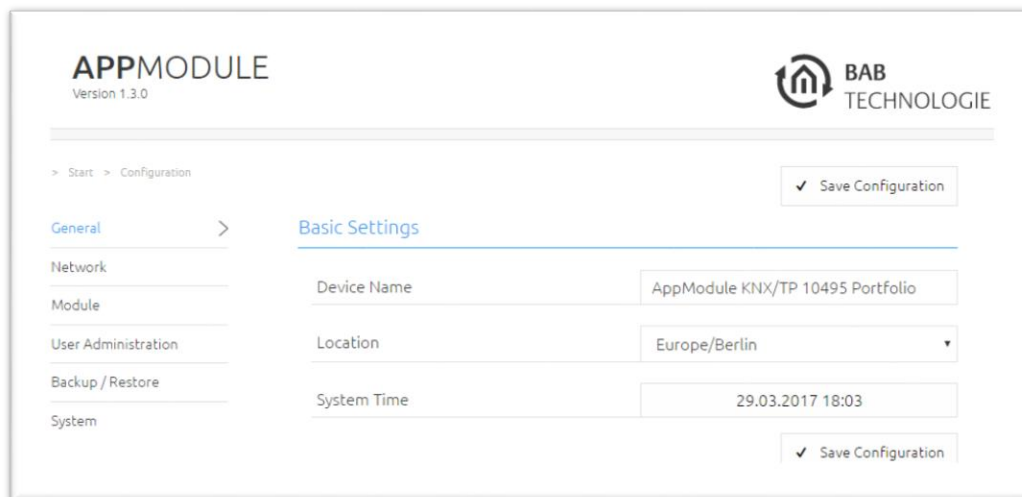


Figure 40: General configurations

Device name: Here, you can assign an individual device name for your **APPMODULE**. This name is then displayed in the "Discovery Tool" and BAB STARTER.

Location: Edit the installation site so that the correct time zone can be set.

System time: The current system time of the device is shown. Clicking the button synchronises the system time of the device with that of the local PC. To synchronise the system time automatically, please use the NTP service. See "[Network](#)".

Note: The system time must be correct for the software to run properly. Please make sure that the system time is always correct. If synchronisation with NTP is not possible, correct the system time manually.



7.3 NETWORK

- DHCP:** If DHCP is active, the device automatically obtains the network settings. A DHCP server must be available in the local network.
- IP address / network mask / gateway:** If DHCP is not active, the network settings must be carried out statically. In case of doubt, contact your network administrator as to which settings are to be carried out. Please note that an IP address may never be assigned twice!
- DNS server:** DNS is the abbreviation for Domain Name System. The DNS server converts Internet addresses, for example "www.bab-tec.de" into the IP address "85.214.89.170" and vice versa. Without a valid DNS entry, NTP-, weather- and UPnP-service do not work.
- NTP server:** NTP is a free service for synchronising the system time of Internet-compatible devices. If time synchronisation is not possible, please correct the system time manually. See "[General](#)".
NTP server list: e.g. <http://www.pool.ntp.org/zone/europe>

The screenshot displays the APPMODULE web interface for network configuration. The top header shows 'APPMODULE Version 1.3.0' and the 'BAB TECHNOLOGIE' logo. A breadcrumb trail indicates the path: '> Start > Configuration'. A 'Save Configuration' button with a checkmark is located in the top right. On the left, a sidebar menu lists various configuration categories: General, Network (highlighted with a blue bar and a right-pointing arrow), Module, User Administration, Backup / Restore, and System. The main content area is titled 'Device Settings' and contains three sections: 'DHCP' with a checkbox, 'DNS Server' with three input fields for DNS Server #1 (172.31.49.11), DNS Server #2 (8.8.8.8), and DNS Server #3 (empty), and 'NTP Server' with three input fields for NTP Server #1 (0.de.pool.ntp.org), NTP Server #2 (2.2.2.2), and NTP Server #3 (empty).

Figure 41: APP MODULE – Network settings



7.4 MODULE

The “Module” configuration menu is used for configuring the KNX parameters. The parameters are relevant for all **APPMODULE** versions, IP (10491), KNX (10495) and EnOcean (13501). With IP (10491) and EnOcean (10495), the configuration regulates KNXnet/IP communication. For more information, please see “[Module \(KNX configuration\)](#)”.

7.5 ENOCEAN EDITOR

Displayed with the EnOcean **APPMODULE** device module (13501). More information on configuration is available in “[APP MODULE EnOcean](#)”.



7.6 USER ADMINISTRATION

The user data required to access the **APPMODULE** Web interface is managed here. This user data is also requested when you access the EnOcean Editor from BAB STARTER. To change or add users, click “User administration” in the “Configuration” menu item.

Note: Make sure that you always assign secure passwords and follow standard password guidelines.

DISABLE PASSWORD RECOVERY

If this option is selected, the password cannot be reset and the device must be sent in if you lose the password.

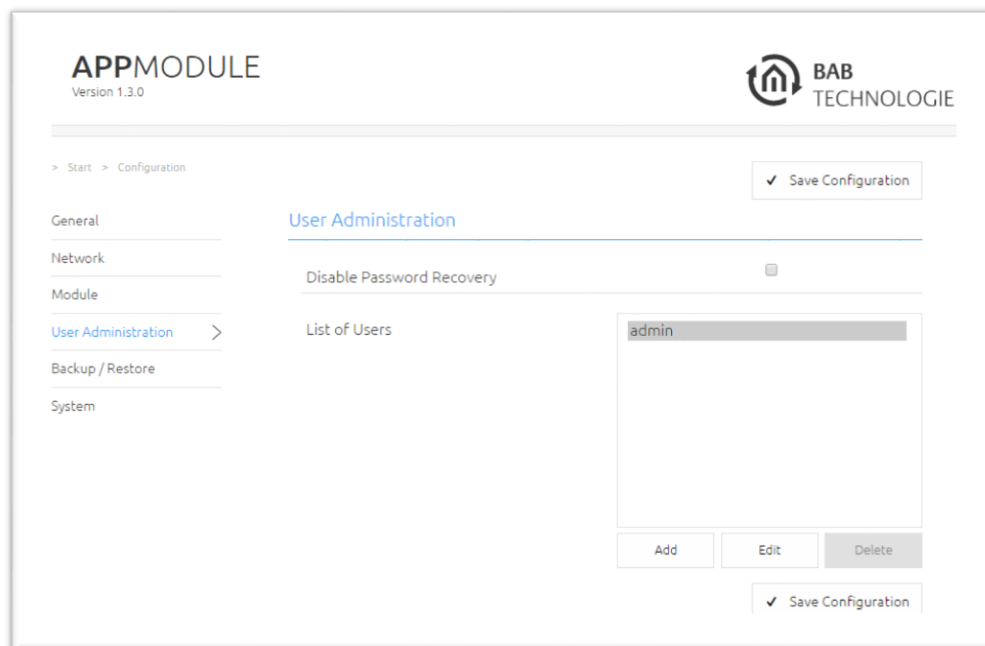


Figure 42: User administration



7.7 BACKUP THE SETTINGS

The configuration data of the **APPMODULE** should be backed up at regular intervals in order to ensure that the current configuration status can be restored at any time.

Note: Please note that apps and app instances must be saved separately. This is particularly important before a firmware update.

Figure 43: Backup / Restore

CREATING A BACKUP

Select the checkboxes under “Modules” to set which configuration data is to be backed up.

- *Configuration:* All configuration data except for app configuration data.

Note: The network settings are not backed up; these are separate from the backup data.

- *Statuses & logging:* The address status table and logging table are backed up. This is important, as it ensures that the status information can also be restored. Otherwise, status information will be established on the basis of the current telegram communication.



- *Apps and app Instances:* Backs up all app-related data. Individual apps and instances can be selected for backup from the drop-down menu.

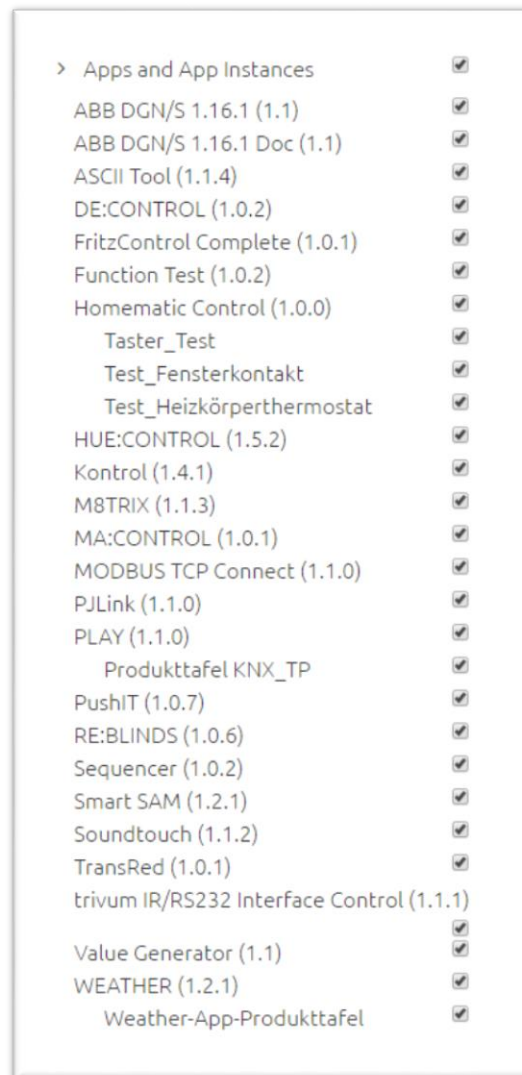


Figure 44: Selecting apps and app instances for backup

Comments regarding the backup can be added in the “Comments” field.

- Click on “Create backup” to launch the backup process.
- The backup file is generated by the system and provided automatically for download using the browser download dialogue.

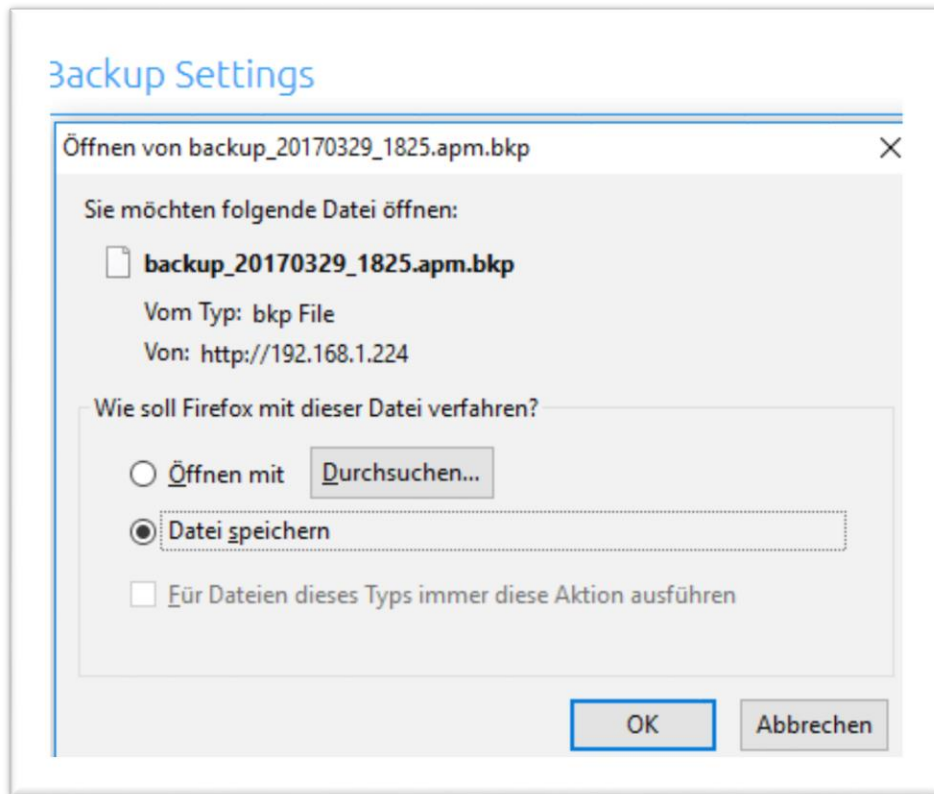


Figure 45: Downloading backup

RESTORING A BACKUP

- Select an **APPMODULE** backup file using the “Select backup file” button. The files have the extensions “*.apm.bkp”.
- Information for the selected file is displayed in the “Backup created on”, “Firmware version” and “Comments” fields.
- The “Modules” field shows which modules are available in the selected backup file. You can also use the checkboxes to select which modules are to be restored.
- *Configuration:* All configuration data except for the app configuration data.

Note: The network settings are not part of the backup file.

- *Statuses & logging:* The address status table and logging table are restored. This is important, as it ensures you can access the status information in the apps after restore.
- *Apps and app instances:* Restores the app-related data. Individual apps and instances can be selected for restore from the drop-down menu (see *Fehler! Verweisquelle konnte nicht gefunden werden.*).



7.8 SYSTEM / FIRMWARE UPDATE

SERVICE

Here, you can restart the control software for the apps and the apps ("Restart software"), or the entire device ("Restart device").

FIRMWARE UPDATE

Each **APPMODULE** can be updated. The firmware update is free of charge. The current firmware files can be found on the BAB homepage. Proceed as follows to update the device:

- Download the current firmware image from the download area www.bab-tec.de.
- Unpack the file to any folder.

Note: Generate a new backup including all apps and app instances before you launch the update (see "Backup the settings"). The update process restores the factory settings.

- Open "Configuration" – "System".


The screenshot displays the 'APPMODULE Version 1.3.0' interface. The top right corner features the 'BAB TECHNOLOGIE' logo. The left sidebar contains a navigation menu with options: General, Network, EnOcean Editor, Module, User Administration, Backup / Restore, and System (which is currently selected). The main content area is titled 'Configuration' and includes a 'Save Configuration' button with a checkmark. Below this, the 'Service' section contains two rows: 'Restart Software' with an 'Initiate Restart' button, and 'Reboot Device' with an 'Initiate Reboot' button. The 'Firmware Update' section follows, showing 'Current Firmware' as '1.3.0', a 'Select Update File' button with a file icon, an 'Update Type' dropdown menu, a 'Version' dropdown menu, and an 'Update Options' dropdown menu set to 'Keep Configuration'. A large 'Perform Update' button is at the bottom of this section.

Figure 46: Configuration – System

- Select the firmware image file (*.bin extension) using the "Select update file" dialogue. Update type and version are displayed.



- Please choose one of the update options
 1. *Keep Configuration*: All settings, apps and instances will be preserved
 2. *Keep Network Settings*: Only the network settings will be preserved.
Caution: all other settings as well as all your apps and their instances will be deleted
 3. *Reset Configuration*: The device will be reset to factory defaults during the update.

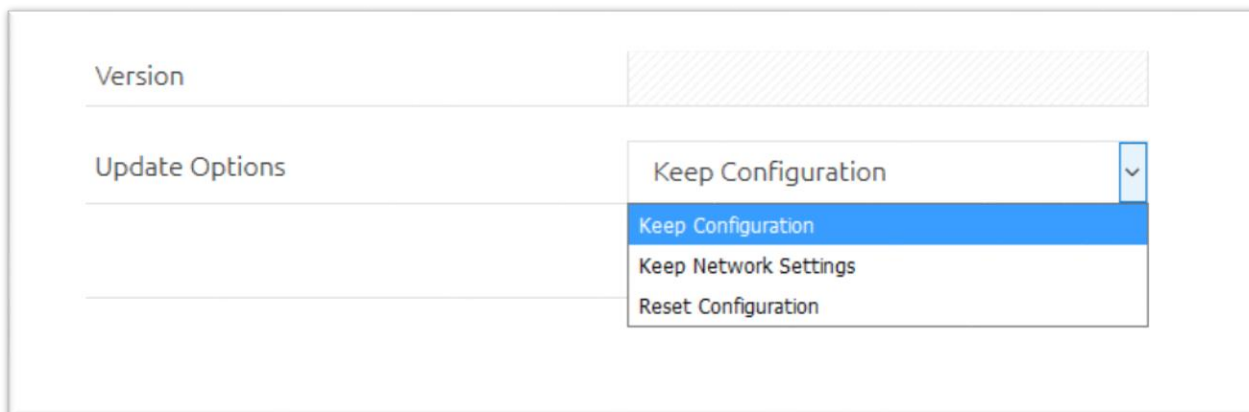

The screenshot shows a web interface for updating the APPMODULE. It features a 'Version' field with a shaded input area. Below it, the 'Update Options' section contains a dropdown menu. The dropdown is open, showing three options: 'Keep Configuration' (highlighted in blue), 'Keep Network Settings', and 'Reset Configuration'.

Figure 47: Keep network settings

Note: If the “Keep network settings” checkbox is not selected, the APPMODULE can be accessed at the default IP address after the update.

(For factory settings, see “[Initial Operation](#)”)

- Launch the update by clicking on “Perform Update”.

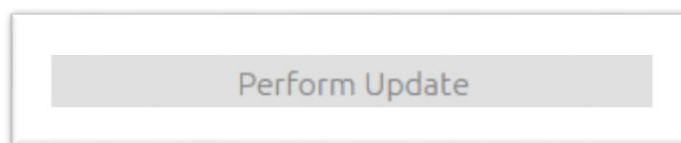


Figure 48: Perform update

- Wait until the update is complete. The Web interface is updated automatically once the process has been successfully completed.
- The update restores the device factory settings (except for the network settings; see above). Individual settings are only loaded again when you restore a backup (see “[Backup the settings](#)”).



8 INFORMATION

Important information on the **APPMODULE** can be found here. Please have this information ready if support is required.

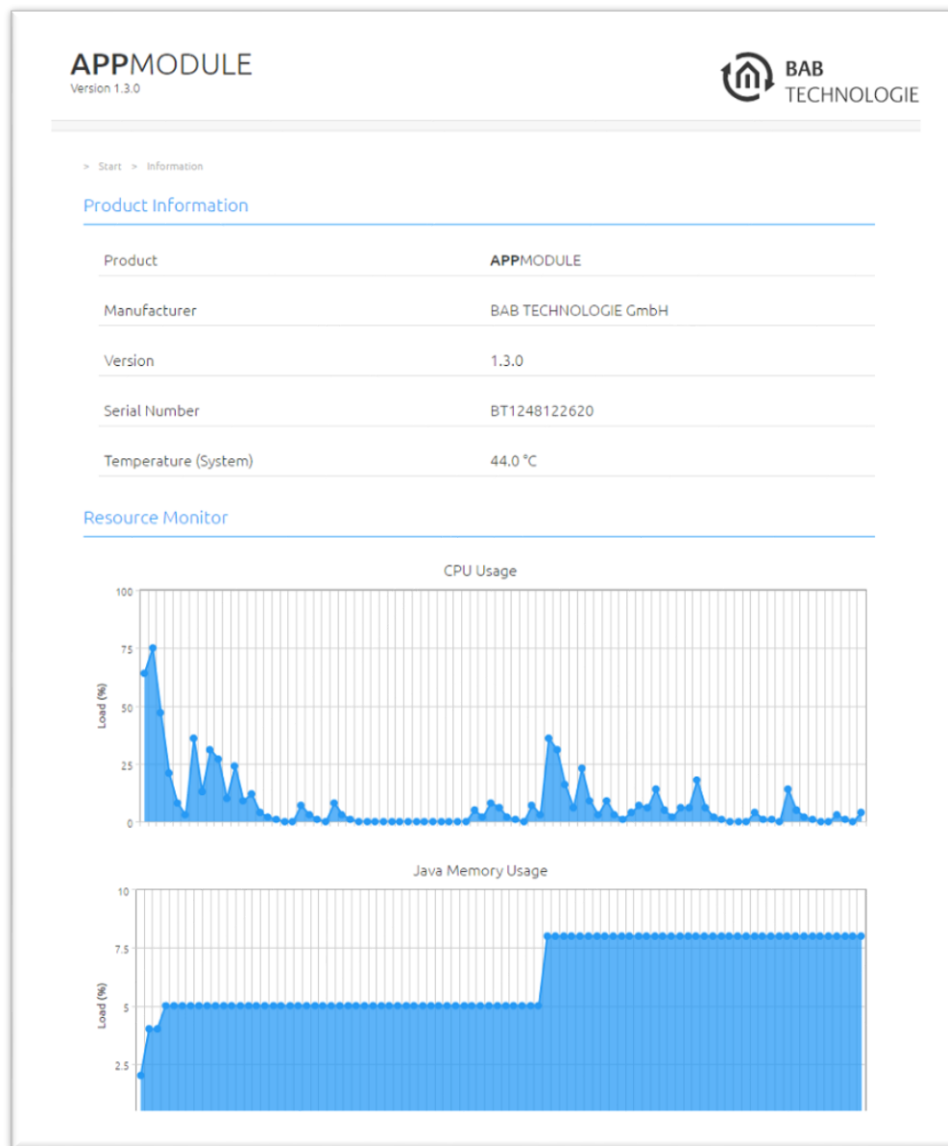


Figure 49: System Information