


LUXOMAT® KNX sensor interface







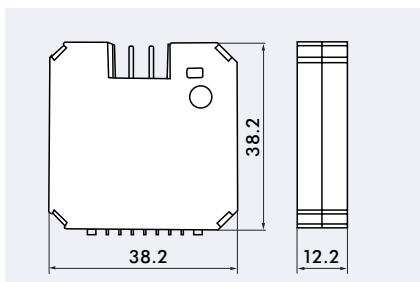


4x




2x



■ TECHNICAL DATA

-  BUS 23 - 30 V
< 10 mA
-  Programming LED
-  Programming key
-  IP20
-  L 38.2 x W 12.2 x H 38.2 mm
-  -25°C to +55°C
-  Plastic LEXAN UL-94-V0

 **► Before programming, please note the device and software version.**

i PRODUCT INFORMATION

- User-friendly ETS interface
- Linking of up to 50 group addresses possible
- Switching and dimming function
- Blind control
- LED activation
- Programmable behaviour in the event of BUS power failure or BUS resumption
- Binary input and output device for use in 60 mm buried sockets
- Two or four inputs for floating sensor and switch contacts
- Two or four binary outputs for the activation of control lamps – low current LEDs (I = 2 mA)
- The product database for importing into the ETS must be downloaded from the **B.E.G.** homepage.

■ FUNCTIONAL OVERVIEW

Function	
Switching	✓
Compulsory guide	✓
Encoder	✓
Dimming	✓
Blind control	✓
LED activation	✓



Description	Colour	Part number
KNX sensor interface, 2x	white	90130
KNX sensor interface, 4x	white	90131