


PD4-KNX-GH-SM



SM





i PRODUCT INFORMATION

- KNX occupancy detector designed for high-bay warehouses, with integrated KNX bus connector
- When using the application B.E.G. _Occupancy detector_ 928XX_V5.0, several operation modes are available:
 1. Automatic or semi-automatic mode with daylight-dependent constant light control or switching output
 2. Slave mode
- Up to three additional switching channels – selectively either daylight-dependent or not
- Threshold values and follow-up times can be changed for all channels using communication objects
- Burn-in function with adjustable burn-in time from 1 to 100 hours
- With activatable motion LED, deactivatable via ETS parameter, communication object or remote control

■ TECHNICAL DATA

- 24 V DC from KNX-BUS network
- 7mA
- oval 360°
- max. Ø 30 m towards
- Light control feasible up to 5 m
- IP20 / Class II
- 25 °C to +55 °C
- Housing UV- and shock resistant polycarbonate
- IR-PD-KNX, IR-RC-Adapter with App (iOS / Android)
- For integration in KNX-BUS systems**

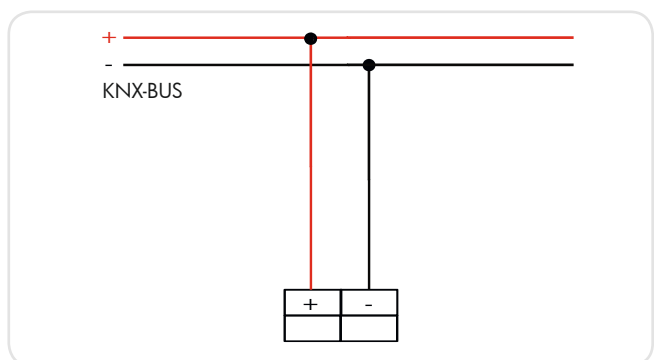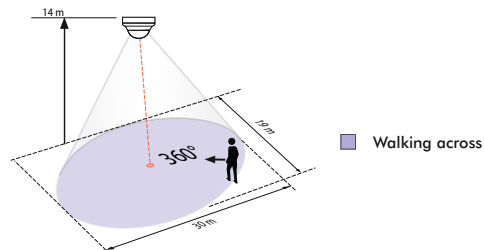

Description	Colour	Part number
PD4-KNX-GH-SM	white	92889
Accessory (optional)		
IR-PD-KNX	grey	92123
IR-RC-Adapter	black	92726