


# Product data sheet



## eNet radio transmitter module 4-gang

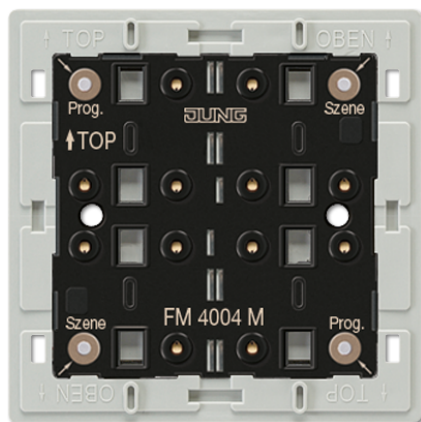

### Reference number

FM 4004 M

### eNet radio transmitter module 4-gang

for cover kit 4-gang, complete, ref.-no.: .. 404 TSA ..

for cover 4-gang with symbols, ref.-no.: .. 404 TSAP ..

Adapter frames are included in delivery: ref.-no. LS 4 AR for LS range (pre-mounted) and ref.-no. CD 4 AR for CD range. AS / A ranges without adapter frame.

Can not be combined with frames in Flat Design.

4 green LED: actuator status

1 red LED: transmission status

### Intended use

- Radio sensor for transmission of switching, dimming, blind movement and scene commands

- Operation with radio actuators from the eNet system

- Mounting on appliance box according to DIN 49073, screw fixing on walls or adhesive fixing on smooth, even surfaces (glass)

### Product characteristics

- Each button is "divided" into an upper and lower half belonging to a channel

- Display of the actuator status for status poll by a green LED per channel

- Display of the transmission status by a red LED

- Switch-on brightness of dimmer actuators can be saved

- Battery-powered device

- Signalling of transmission errors can be switched off

Can be set with eNet server:

- Master dimming function

- Scene All On

- Operation locks

Supplementary functions with eNet server:

- Update of the device software

#### Technical data

Rated voltage:	DC 3 V
Battery type:	1 x lithium CR 2450N (included)
Ambient temperature:	-5 ... +45 °C
Radio frequency:	868.0 ... 868.6 MHz
Transmitting power:	max. 20 mW
Transmission range in free field:	typical 100 m
Receiver category:	2