


Description

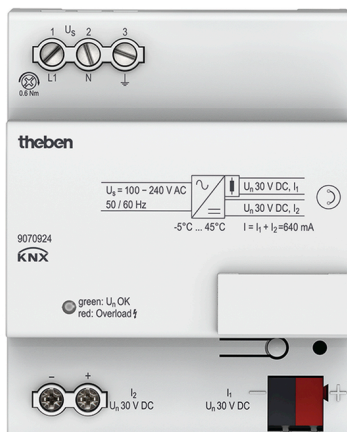

- 640 mA supply voltage
- 30 V DC auxiliary supply
- Power-supplying and monitoring of the KNX system voltage
- Reset key for 20 sec. bus reset
- Continuous short-circuit protection

Technical data

Operating voltage KNX	Bus voltage, ≤12 mA
Operating voltage	100 – 240 V AC
Frequency	50 – 60 Hz
Stand-by consumption	≤0,7 W
Width	4 modules
Installation type	DIN rail
Type of connection	KNX bus terminal
KNX output	1 line with integrated throttle drive
Nominal voltage KNX	30 V DC, ± 2 V, SELV
Nominal current KNX	640 mA
Uninterrupted short-circuit current	max.1,4 A
Mains failure bridging time	min.200 ms
Ambient temperature	-5 °C ... +45 °C
Protection class	II according to EN 60 730-1
Type of protection	IP 20

Scale drawings

