


## Description

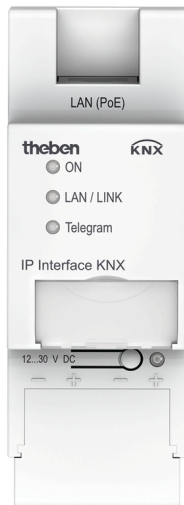

- Interface IP and KNX
- Tunneling: Up to 5 Tunneling Server
- Firmware update (Theben IP Tool Software)
- Power Supply: 12–30 V DC/PoE - IEEE 802.3af class 1

## Technical data

Operating voltage KNX	Bus voltage, ≤10 mA
Operating voltage	12 – 30 V DC
Width	2 modules
Installation type	DIN rail
Type of connection	Bus connection: KNX bus terminal  RJ45 for LAN
Ambient temperature	-5 °C ... +45 °C
Stock temperature	-25 °C ... +55 °C
Protection class	II according to EN 60 730-1
Type of protection	IP 20