


## Description

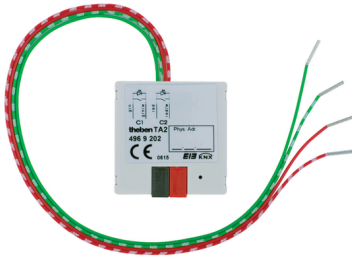

- Binary input/binary output sensor interfaces
- 2-way key interface
- 4-pole cable connection
- Can be installed in flush-mounted sockets with conventional sensors/ switches
- Free allocation of functions: Switch/key, dimming, blinds, valuator
- Inputs can be reconfigured to outputs: binary input: potential-free contact/ binary output: 1 mA (low current) (LED 1 mA types)
- Colour coding of wiring pairs
- Grooves on side of housing for switch/sensor clamps

## Technical data

Operating voltage KNX	Bus voltage, ≤10 mA
Installation type	in flush-mounted socket
Type of connection	KNX bus terminal
Number of inputs	2
Max. cable length	5 m
Length connecting wires	25 cm
Output configuration LED	Low current 1 mA (LED 1 mA types) without series resistor
Contact voltage	3,3 V
Contact current	0,5 mA
Interface extension max.	5 m
Reaction in case of bus recovery	Adjustable
Ambient temperature	-5 °C ... +45 °C
Type of protection	IP 20
Protection class	III

## Connection example

