


## Description

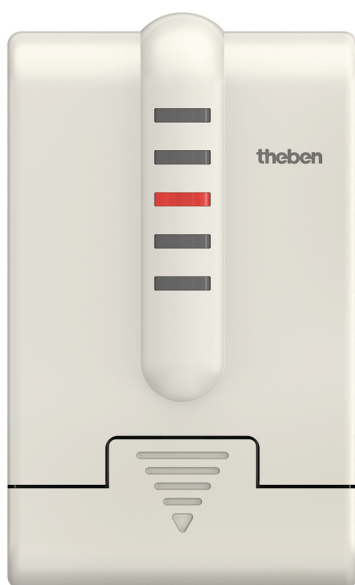


- Motorised actuator for heater valve or for controlling the heating valves
- Without integrated control
- Display via LEDs (red)
- Display of valve stroke
- Automatic valve stroke recognition
- 2 inputs for window contact, presence detector, remote sensor
- Simple installation by clicking onto valve adapter
- Can be used in heating circuit distributor
- Integrated bus coupling unit
- With summer mode and valve protection
- 2 different valve adapters included (VA 10, VA 78)

## Technical data

Operating voltage KNX	Bus voltage, ≤10 mA
Max. valve stroke	7,5 mm
Controlling torque details	120 N
Runtime	<20 s/mm
Installation type	Locks on valve adapter
Type of connection	6-pole (length 1.0 m)
Behaviour in case of control signature failure	Moves to optional position
Ambient temperature	+0 °C ... +50 °C
Stock temperature	-20 °C ... +60 °C
Medium temperature	≤100 °C
Dimensions	50 mm, 82 mm, 65 mm
Protection class	III according to EN 60730-2-14
Type of protection	IP 21

Article number: 7319200

## Scale drawings

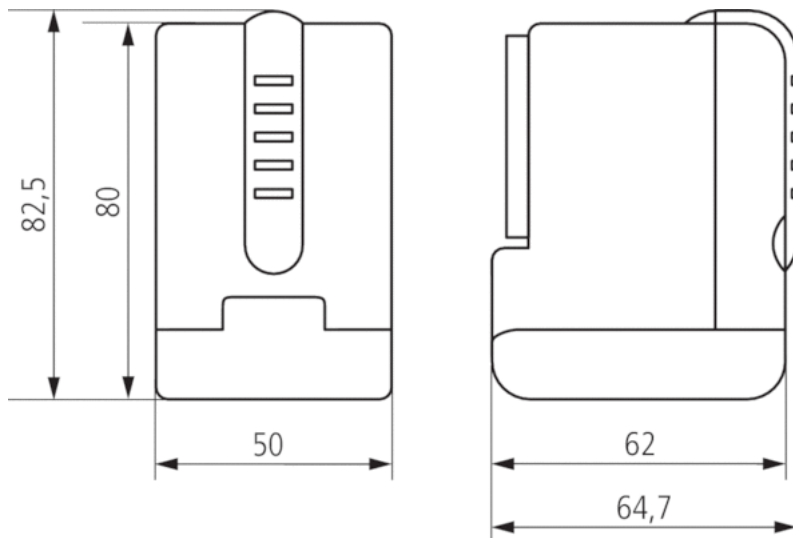

## Accessories

### Valve adapter VA 80

- Article number: 9070437  
Details ▶ [www.theben.de](http://www.theben.de)

