


Description

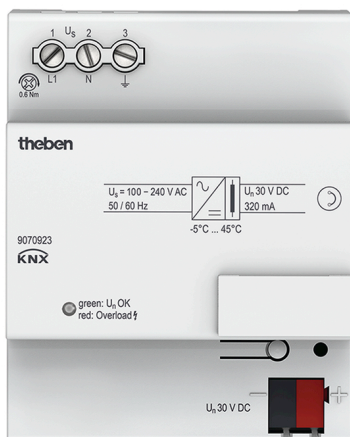

- 320 mA supply voltage
- Power-supplying and monitoring of the KNX system voltage
- Reset key for 20 sec. bus reset
- Continuous short-circuit protection

Technical data

Operating voltage KNX	Bus voltage, ≤ 12 mA
Operating voltage	100 – 240 V AC
Frequency	50 – 60 Hz
Stand-by consumption	$\leq 0,7$ W
Width	4 modules
Installation type	DIN rail
Type of connection	KNX bus terminal
KNX output	1 line with integrated throttle drive
Nominal voltage KNX	30 V DC, ± 2 V, SELV
Nominal current KNX	320 mA
Uninterrupted short-circuit current	max.0,8 A
Mains failure bridging time	min.200 ms
Ambient temperature	-5 °C ... +45 °C
Protection class	II according to EN 60 730-1
Type of protection	IP 20

Scale drawings

